

# VIAVI

## MSQ-800 MicroStealth QAM

### QAM Signal Level Meter

VIAVI provides a new level of value and performance in a QAM signal level meter (SLM). The MicroStealth QAM SLM is an ideal tool for field technicians seeking a single tool to quickly ensure the quality of digital cable services.

The MSQ-800 is simple and compact, yet packs an impressive feature set with remarkable performance. It provides all the necessary tests for verifying digital and analog cable services. The digital measurements include digiCheck digital signal level, modulation error ratio (MER), and pre- and post-FEC bit error ratio (BER). The MSQ-800 also possesses the features expected in a good SLM including analog channel video level, video-to-audio level, carrier-to-noise (C/N), full scan, and tilt.

In addition to verifying digital and analog services, the MSQ-800 can also accomplish its tasks quickly and efficiently. Users can reach all tests with one button press from the main menu, making training an issue of the past. An automated test feature lets users execute a set of user-defined tests with Pass/Fail indication to ensure that tests are performed consistently at each installation without wasting time.

The MSQ-800 addresses the traditionally difficult task of configuring an instrument to perform digital measurements,



### Key Features


- Complete analog and digital measurement solution
- MER, pre- and post-FEC BER, digiCheck™ digital power level
- Analog video level, V/A level, C/N
- AutoTest, fast automated testing to qualify multiple digital and analog channels with Pass/Fail indication
- AutoPlan™, industry-leading automatic channel plan builder with digital QAM detection
- Scan and Tilt measurements show frequency distortion problems
- Simplified icon-based user interface reduces training time from days to hours

### Applications


- Accelerate the digitization of cable services while ensuring quality of service
- Reduce service call rates with proper testing of digital services quickly at every install
- Troubleshoot analog and digital services faster by isolating problems quickly
- Increase the consistency of field technician performance
- Cost-effectively deploy your QAM SLM to the field workforce with confidence in quality and performance

including MER and BER. The new AutoPlan functionality automatically detects channel type (analog or digital), the QAM type (64- or 256-QAM), symbol rate, and spectral inversion. Users only need to select the correct channel plan template and the MSQ will automatically build a channel plan based on the live signals it discovers.


Don't let the compact form factor of the MSQ-800 fool you; inside it contains a performance measurement engine of the highest quality and accuracy. Achieving this level of performance in a highly portable instrument is a technical achievement that can only be achieved by a brand with an outstanding track record, heritage, and technical expertise.

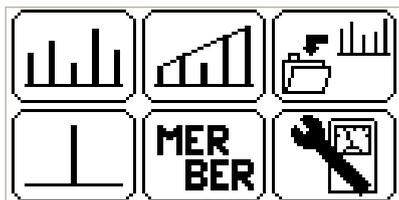

The icon-based Main Menu of the MSQ-800 displays the top five tests most commonly performed for ease of use and to simplify training.

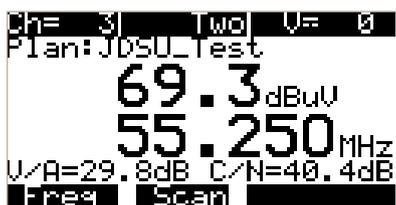

The MSQ-800 performs SLMs on both analog and digital signals and displays the information on one screen.

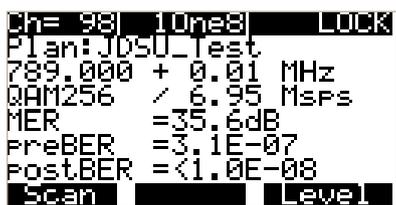

The MSQ-800 performs QAM testing on QAM-64/256 providing results for MER and Pre/Post-BER measurements.



The MSQ-800 can also perform full channel plan scans and Tilt measurements to easily identify problems in the network.

### Signal Level Measurements

The MSQ-800 can measure signal levels of both analog and digital carriers. For analog signals the meter will display the video carrier level, video frequency, C/N, and video-to-audio delta. For digital channels the MSQ-800 measures the digital average power of the digital carrier and displays the center frequency. To allow additional flexibility, users can choose to tune the MSQ-800 by either the programmed channels in the channel plan or by frequency.

### Full Scan Mode

The MSQ-800 lets users see all the channel levels on one screen, letting them quickly verify if certain channels are missing or if the network has other issues, such as roll-offs or suck-outs. Two adjustable markers are available to identify specific channels and to troubleshoot issues.

### Tilt Mode


The MSQ-800 can show if the network being tested has a positive or negative tilt over channel frequencies. Users can quickly choose which tilt channels to measure to help identify proper tilt settings.

### MER/BER Mode


MER/BER mode lets users test digital QAM Annex A (DVB-C) channels for digital quality measurements and display their MER and Pre- and Post-BER. They can also display the digital carrier's modulation information (QAM-64/256 and Msps).

### Autotest Mode


Technicians can perform automated testing with the MSQ-800 using the Autotest mode. They can perform Pass/Fail tests and upload results via an MSQ-PC software application for recordkeeping, which simplifies verification testing and maintains consistent testing parameters.

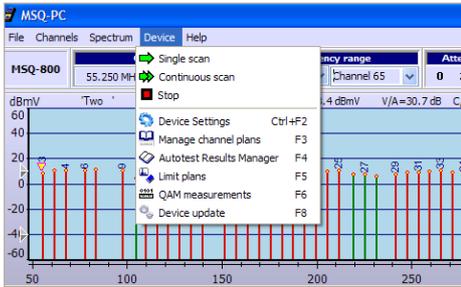

With the MSQ-800 connected to the MSQ-PC, users can access meter settings, channel plans, limit plans, and Autotest results.

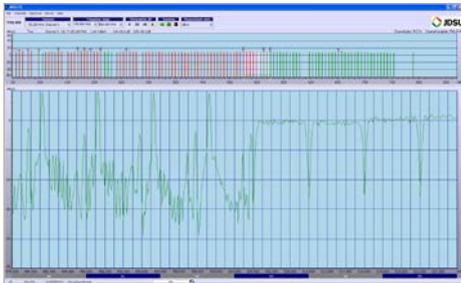

The MSQ-PC main screen shows the Fullscan levels of the active channel plan and individual channel measurements. On the lower panel the MSQ-PC lets users view the downstream spectrum of live RF signals.

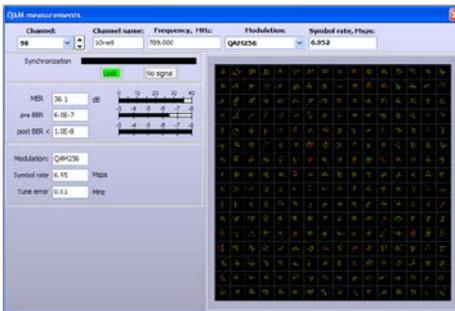

The MSQ-PC also provides users with access to more QAM measurements, such as the constellation diagram of the QAM signal, which is not visible on the MSQ-800 meter itself.

## MSQ-PC

MSQ-PC is the computer software application included with the MSQ-800 that is used to quickly and efficiently configure the MSQ-800. The MSQ-PC, connected via USB to the MSQ-800, helps users configure settings, channel plans, limit plans, and facilitate updates to the MSQ-800. It is also used to extract Autotest results for recordkeeping and archiving and performing live measurements when connected to RF signals.

## Channel Plans

Users can create Channel Plans using the AutoPlan method on the MSQ-800 device, creating them entirely on the MSQ-PC, or using the MSQ-800 in combination with the MSQ-PC to make final edits and modifications. With the ability to transfer channel plans between the MSQ-PC and the MSQ device allows for making modifications quickly as channel plans evolve.

## Autotests

Easily upload results from Autotests on the MSQ-800 to the MSQ-PC for printing or recordkeeping. As technicians finish jobs they can use the MSQ-PC to connect test results to their jobs or to print Autotest files or electronically attach them to other files.

## Channel Scan

Connecting the MSQ-800 to both the MSQ-PC and an RF signal allows for taking live measurements from cable plant, such as a Fullscan of the active Channel Plan, which shows graphical representations of video levels in the top window. Users can see information on individual channels by simply clicking on the desired channel.

## Downstream Spectrum

Connecting the MSQ-800 to the MSQ-PC software also provides a live view of the downstream spectrum. Users can specify the frequency span desired by clicking and dragging a start and stop marker to the desired frequencies.

## QAM Measurements

Using the MSQ-800 connected to the MSQ-PC also lets users view QAM measurements such as MER, Pre- and Post-BER, and a constellation diagram of a specific QAM-64 or -256 channel.

## Specifications

Frequency	
Measurement range	48 to 870 MHz
Tuning resolution	125 kHz
Channel bandwidth (nominal)	8 MHz
Level Measurement, Analog	
Video types	ITU Systems B/D/G/H/I/K
Audio types	FM, Single audio
Audio offset per template	+6.0 MHz (I); +5.5 MHz (B/G/H); +6.5 MHz (D/K)
Resolution bandwidth (nominal)	230 kHz
Measurement resolution	0.1 dB
Minimum detectable	-35 dBmV
Maximum total integrated RF power	+60 dBmV
Accurate range	-10 to +50dBmV
Accuracy	±1.5 dB, 25°C ±2.5 dB, -10 to +50°C
C/N offset	±8 MHz
Level Measurement, Digital	
Algorithm	digiCheck
Measurement bandwidth	5.0 to 8.0 MHz
Measurement resolution	0.1 dB
Minimum detectable	-25 dBmV
Maximum total integrated RF power	+60 dBmV
Accurate range	-10 to +50dBmV
Accuracy	±1.5 dB, 25°C ±2.5 dB, -10 to +50°C
Full Scan and Tilt	
Tilt	A/B delta, dB
Resolution	0.1 dB
QAM Measurements <sup>1</sup>	
Encoding	ITU J.83 Annex A (DVB-C)
Modulation types	64- and 256-QAM
QAM parameters	AutoChan™
Minimum lock level (256-QAM)	-15 dBmV
Maximum total integrated RF power	+50 dBmV
MER units	dB MER or %EVM
MER	21 to 35 dB (64-QAM) 28 to 35 dB (256-QAM)

<sup>1</sup> Analog first adjacent channels ≤ +10 dBc  
 Digital first adjacent channels ≤ +6 dBc  
 Total analog power (64+ channels) ≤ +2 dBc  
 Total digital power (100+ channels) ≤ +24 dBc

<b>QAM Measurements<sup>1</sup> continued</b>	
MER resolution	0.1 dB
Algorithm	Sliding Window
Minimum Pre-FEC BER	1.0E-8
Minimum Post-FEC BER	1.0E-8
Symbol rate	5.00 to 7.00 Msps
Resolution	0.01 Msps
Frequency offset resolution	0.01 MHz
<b>Channel Templates</b>	
Channel templates available	China; PAL B/G; PAL UK; France; Ireland; SECAM D/K
Channel type algorithm	AutoChan
<b>Channel Plans</b>	
Plan creation algorithm	AutoPlan
Plan index	1 to 16 (maximum)
Plan name	15 characters (maximum)
<b>Channels</b>	
Channel index	1 to 112 (maximum)
Channel identifier	3 characters (maximum)
Channel name	6 characters (maximum)
<b>Standards Compliance</b>	
Shock and vibration	IEC 60068
Drop	EC 61010
Safety—emissions	EN55022
Safety—immunity	EN 61000
<b>Interfaces</b>	
RF input	75Ω
F connector	F81 replaceable barrel
Protection	Max. sustained 140 VAC Max. sustained 140 VDC
USB interface	v2.0, CDC device
USB connector	USB-B receptacle
<b>MSQ-PC Capabilities</b>	
Measurements	Downstream spectrum Constellation diagram
Asset management	Firmware upgrade Serial number
Configuration	Settings management Channel Plan management Autotest management

<sup>1</sup> Analog first adjacent channels ≤ +10 dBc  
Digital first adjacent channels ≤ +6 dBc  
Total analog power (64+ channels) ≤ +2 dBc  
Total digital power (100+ channels) ≤ +24 dBc

General	
Display	White on blue, reversible
Language support	English
Dimensions	147 x 82 x 43 mm (5.8 x 3.2 x 1.7 in)
Device weight	0.35 kg (0.77 lbs)
Storage temperature	-20 to +50°C (-4 to +122°F)
Operating temperature	-10 to +50°C (+14 to +122°F)
Charge temperature	+0 to +40°C (+32 to +104 °F)
Power	Four 1600 mAh NiMH AA cells 6 hours (typical)
Charge time	12 hours (typical)
Power supply input	90 to 240 VAC 50 to 60 Hz
Power supply output	12 VDC 600 mA (maximum)

## Ordering Information

Description	Part Number
MSQ-800 Unit	MSQ800
MSQ-800 5 Pack	MSQ8005PK
Replacement Protective Sleeve	MSQ800SLEEVE
Replacement Charger	MSQ800CHGR



Contact Us **+1 844 GO VIAVI**  
(+1 844 468 4284)

To reach the VIAVI office nearest you,  
visit [viavisolutions.com/contact](https://www.viavisolutions.com/contact)

© 2019 VIAVI Solutions Inc.  
Product specifications and descriptions in this  
document are subject to change without notice.  
msq800-ds-cab-tm-ae  
30162772 900 0709