


VIAVI

Tunable DBR Laser (mTLG-C3)

MAP Series Distributed Bragg Reflector Laser

The Multiple Application Platform (MAP series) Tunable Distributed Bragg Reflector (DBR) Laser (mTLG-C3) is a next-generation tunable laser that is ideal for DWDM testing that requires changing the wavelength on demand over the C- and L-band with 50 GHz spacing.

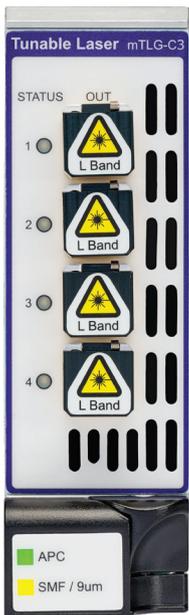

The mTLG-C3 is based on a Sampled Grating Distributed Bragg Reflector (SG-DBR) laser with an integral wavelength locker. Wavelength and output power settings can be controlled using the MAP series local interface or automation interfaces. The integrated wavelength locker and automatic power control loop provide stable operation. The mTLG-C3 module is a new generation tunable laser module, which is ideal for DWDM testing where the capability to change.

Functional Description

The mTLG laser modules integrate up to 4 VIAVI Transmit Optical Sub-Assembly TOSA-based Integrable Tunable Laser Assemblies (ITLA) that incorporate an SG-BGR, a Semiconductor Optical Amplifier (SOA), and an integral wavelength locker, all enclosed in a high reliability, hermetically sealed (TOSA) package.

Key Features and Benefits


- Single, dual, or quad channel configurations are available
- C- or L-band tunability
- 47.5 nm C-band wavelength tuning range (36 nm L-band)
- Full channel coverage between C and L-band
- 50 GHz channel spacing
- Narrow linewidth $\leq 200\text{KHz}$ (C-band) and 500KHz (L-band)
- $>15\text{ dBm}$ C-band output power ($>14\text{ dBm}$ L-band)
- SMSR 35 dB min

Applications

- Optical amplifier testing
- Tunable laser grids
- DWDM transmission testing
- Fiber characterization
- Transmitter and receiver testing

Compliance

- The MAP Tunable DBR Laser, when installed in a MAP chassis, complies with CE, CSA/UL/ IEC61010-1, plus LXI class C requirements and meets the standard IEC 60825-1 class 1M requirements



An intuitive graphic user interface (GUI) is optimized for use in either a laboratory or a manufacturing environment. Efficient transition between summary and detailed views (Figure 1 and Figure 2) allow users to operate at a system level or access the full power of a module.

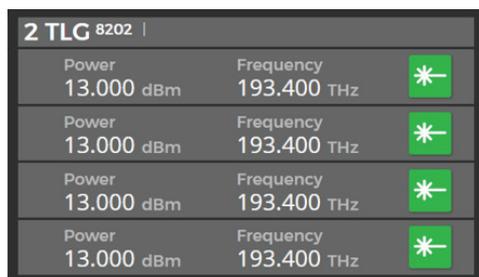


Figure 1 – mTLG MAP-300 summary view GUI

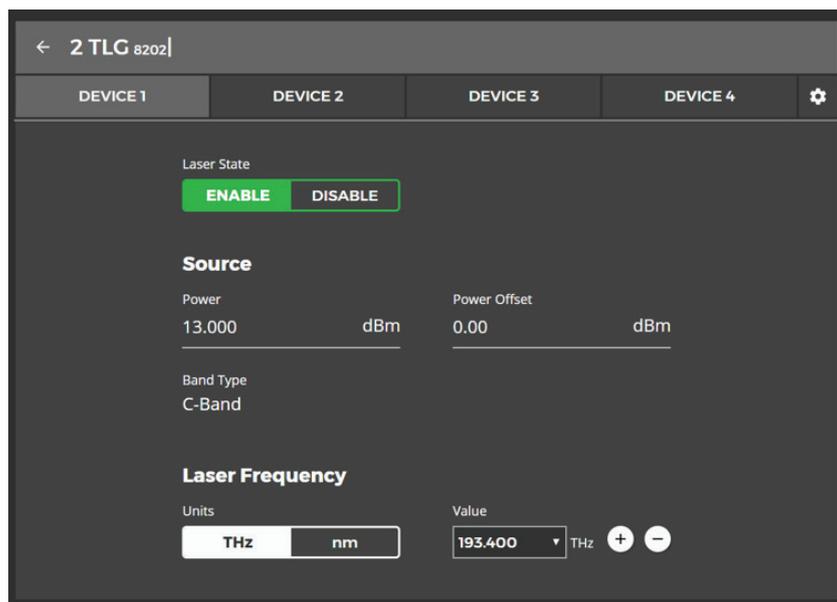


Figure 2 – mTLG MAP-300 detailed view GUI

Options and Configurations

The TLG laser module advances the optical source capability by offering C or L band tunability, and dense configurations with 1, 2 or 4 sources per module.

Chassis and Modular Family

The VIAVI Multiple Application Platform (MAP) is a modular, rack mountable or benchtop, optical test and measurement platform with chassis' that can host 2, 3 or 8 application modules. The LightDirect family of modules are characterized by their simple control and single function nature. Individually or together they form the foundation of a diverse array of optical test applications. The web enabled multiuser interface is simple and intuitive. LXI compliant with a full suite of SCPI based automation drivers and PC based management tools, the VIAVI MAP is optimized for both the lab to manufacturing environments.

The mTLG is part of the LightDirect module family. Alongside the many other modules, such as light sources, polarization scramblers, power meters, and spectrum analyzers, the MAP series is the ideal, modular platform for photonic system and module testing.

The mTLG is compatible with all current MAP-300 and MAP-220 chassis.



Light Direct

Specifications

For more information on this or other products and their availability, please contact your local VIAVI account manager or VIAVI directly at 1-844-GO-VIAVI (1-844-468-4284) or to reach the VIAVI office nearest you, visit viavisolutions.com/contacts.

| Parameters | C-band | L-band |
|---------------------------------------|---|---|
| Wavelength | | |
| Tuning range | 190.70 to 196.65 THz, 1524.50 to 1572.06 nm | 186.35 to 190.90 THz, 1570.42 to 1608.76 nm |
| Accuracy ^{1,2,3} | ±1.5 GHz (±0.012 nm) | |
| Stability 15 minutes ^{1,2,3} | ±0.005 nm typical | |
| Stability 24 hours ^{1,2,3} | ±0.005 nm typical | |
| Channel spacing | 50 GHz (0.431 nm) | |
| Frequency Tuning Speed | 30 sec max; <6s typical | |
| Power | | |
| Setting range ⁴ | 10 to 15 dBm | 7 to 14 dBm |
| Stability 15 minutes ^{1,2,3} | ±0.01 dB max ±0.005 dB typical | |
| Stability 24 hours ^{1,2,3} | ±0.01 dB typical | |
| Resolution | <0.1 dB typical | |
| Linewidth | ≤200 KHz | ≤500 KHz |
| Spectral properties | | |
| RIN | -140 dB/Hz typical; -135 dB/Hz max | |
| SMSR | 35 dB min | |
| Other | | |
| Fiber type | Polarization maintaining fiber; polarization aligned to slow axis and connector | |
| Warm-up time ² | 1 hour | |
| Supported connectors | FC/APC | |
| Humidity | <80% RH, 10 to 40°C noncondensing | |
| Operating temperature | 10 to 40°C | |
| Dimensions | 4.06 x 13.26 x 37.03 (1.6 x 5.22 x 14.58 in) | |
| Weight | 1.3 kg (2.95 lb) maximum (varies with configuration) | |
| Calibration period | 1 Year | |
| Mainframe Compatibility | MAP-300 and MAP-220 | |

1. At full power

2. After 1-hour warm up

3. Constant temperature within 25 ±3°C

Ordering Information

| Part Number | Description |
|----------------------|---|
| MTLG-C3C10-M100-MFA | Single C-band 50GHz step tunable laser, single mode FC/APC |
| MTLG-C3C20-M100-MFA | Dual C-band 50GHz step tunable laser, single mode FC/APC |
| MTLG-C3C40-M100-MFA | Quad C-band 50GHz step tunable laser, single mode FC/APC |
| MTLG-C3L10-M100-MFA | Single L-band 50GHz step tunable laser, single mode FC/APC |
| MTLG-C3L20-M100-MFA | Dual L-band 50GHz step tunable laser, single mode FC/APC |
| MTLG-C3L40-M100-MFA | Quad L-band 50GHz step tunable laser, single mode FC/APC |
| MTLG-C3C1L1-M100-MFA | Single C-band and L-band 50GHz step tunable laser, single mode FC/APC |

Accessories

| Accessories (Optional) | Product and description | |
|-------------------------------------|----------------------------|--|
| Inspection and cleaning tool | CleanBlastPRO™ | The patented VIAVI Solutions® CleanBlastPRO fiber end-face cleaning system provides a fast, effective, and cost-efficient solution for removing dirt and debris from connectors in most common applications. |
| | FiberChek probe microscope | One-button FiberChek Probe delivers a reliable, fully autonomous, handheld inspection solution for every fiber technician. |
| | P5000i fiber microscope | Automated Fiber Inspection and Analysis Probe provides PASS/FAIL capability to PC, laptops, mobile devices and VIAVI test solutions. |
| Replacement Parts | Mating sleeves | AC500; FC/PC-FC/PC Universal Connector Adapter |
| | | AC501; FC/PC-SC/PC Universal Connector Adapter |
| | | AC502; FC/APC-FC/APC Universal Connector Adapter |
| | | AC503; FC/APC-SC/APC Universal Connector Adapter |

A wider range of inspection tools are available at VIAVI. More information about the products and accessories can be accessed through our website at www.viavisolutions.com. For further assistance please contact your local VIAVI account manager or VIAVI directly at 1-844-GO-VIAVI (1-844-468-4284) or to reach the VIAVI office nearest you, visit viavisolutions.com/contacts.

VIAVI Care Support Plans

Increase your productivity! Add a VIAVI Care Support Plan with your purchase for up to 5 years:

- Maintain your equipment for peak performance at a low, predictable cost
- Ensure accurate and repeatable measurements through VIAVI calibration
- Support Plans offer customers priority service and scheduling advantages to accelerate service
- Silver care always includes return-to-VIAVI calibration, but you can upgrade your support plan to include onsite calibration where available

Contact your local representative for more information on VIAVI Care Support Plan options or visit: viavisolutions.com/viavicareplan

Features

| Plan | Objective | Technical Assistance | Factory Repair | Priority Service | Calibration |
|---|--------------------------------------|----------------------|----------------|------------------|-------------|
| Manufacturer Warranty | Repair Manufacturer Defects | Standard Plus | ✓ | | |
|  BronzeCare | Technician Efficiency | Premium | ✓ | ✓ | |
|  SilverCare | Maintenance and Measurement Accuracy | Premium | ✓ | ✓ | ✓ |



Contact Us **+1 844 GO VIAVI**
(+1 844 468 4284)

To reach the VIAVI office nearest you,
visit viavisolutions.com/contact

© 2024 VIAVI Solutions Inc.
Product specifications and descriptions in this document are subject to change without notice.
Patented as described at
viavisolutions.com/patents
mtlgc3-ds-lab-nse-ae
30190909 907 0324