



4100 – MP2 OTDR Modules

T-BERD/MTS-2000, –4000, –5800 Platforms

The Viavi Solutions MP2 OTDR modules provide the optimum performance that fiber installers and service providers need to install, turn-up and maintain optical network architecture, such as long-haul, metro, and wireless back-haul.

The OTDR module’s optical performance, combined with the complete suite of T-BERD/MTS platform testing features, ensures that comprehensive testing is done right the first time.

Standard testing features include:

- Auto-setting of the acquisition parameters
- Automatic macro-bend detection
- Summary results table with pass/fail analysis per the international standards
- Comprehensive event diagnosis
- Bidirectional OTDR analysis
- FastReport onboard report generation



T-BERD/MTS-2000 one-slot handheld modular platform for testing fiber networks



T-BERD/MTS-5800 handheld test instrument for testing 10/100G Ethernet and fiber networks



T-BERD/MTS-4000 two-slot handheld modular platform for testing fiber, copper, and multiple services



Benefits

- Affordable high performance OTDR for long-haul and metro high-speed fiber links
- Turns any technician into an instant fiber expert on Smart Link Mapper (SLM) apps
- Instantly detects traffic when connected to live fiber
- Eliminates testing errors due to incorrect setup with SmartTEST

Key Features

- Up to 45dB dynamic range and 256,000 acquisition points
- Dual, tri-wavelength versions with 1310/1550/1625 nm
- Integrated CW light source and optional power meter through the OTDR port
- Ready for SLM and OptiPulses intelligent optical application software

SmartTEST

The SmartTEST OTDR application eliminates all complex OTDR setup errors. The technician can simply load a pre-defined SmartConfig™ that includes all the necessary testing parameters. These SmartConfigs could be generic, set by Viavi, or customer specific, set by the manager or network engineer.

Managers/Network Engineers




Technicians/Field Users




OptiPulses

OptiPulses OTDR option uses an automated multi-pulse acquisition to let technicians characterize the entire link, from the few first meters, at the central office, to the last kilometers. Short-pulse and long-pulse OTDR traces are displayed on the same graphic with the information from both combined into a single table of events.

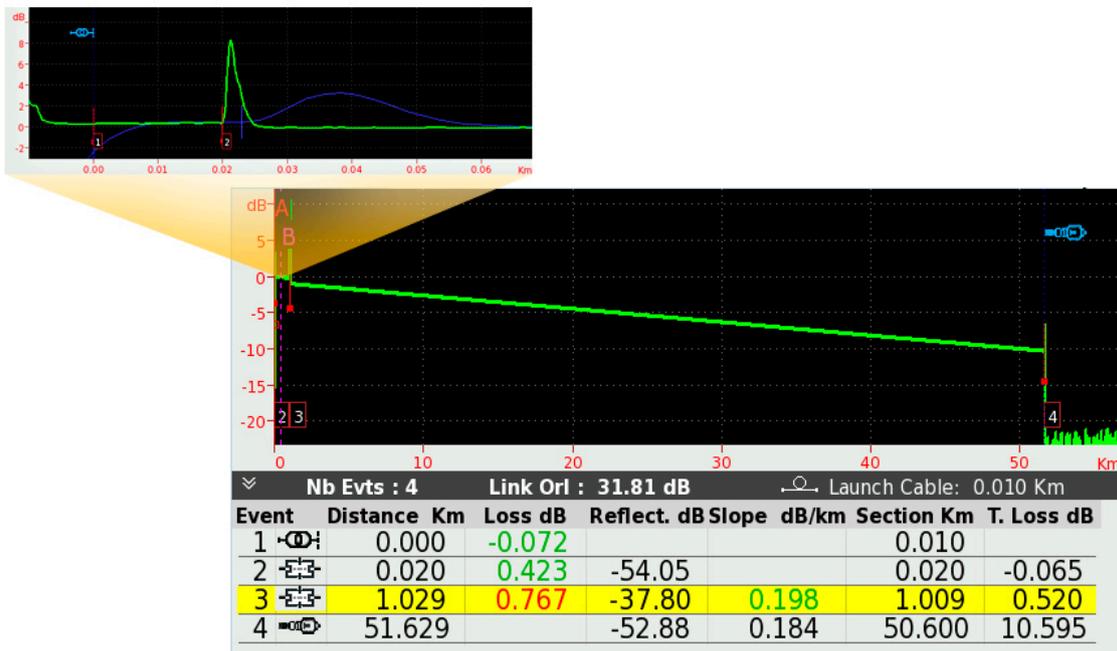

Smart Link Mapper (SLM)

SLM analyzes and identifies events of any OTDR trace, new or old. It represents them as simple icons with immediate pass/fail information based on user-defined or IEC/TIA standards thresholds. It explicitly names the type of optical element such as splice, connector or bend.

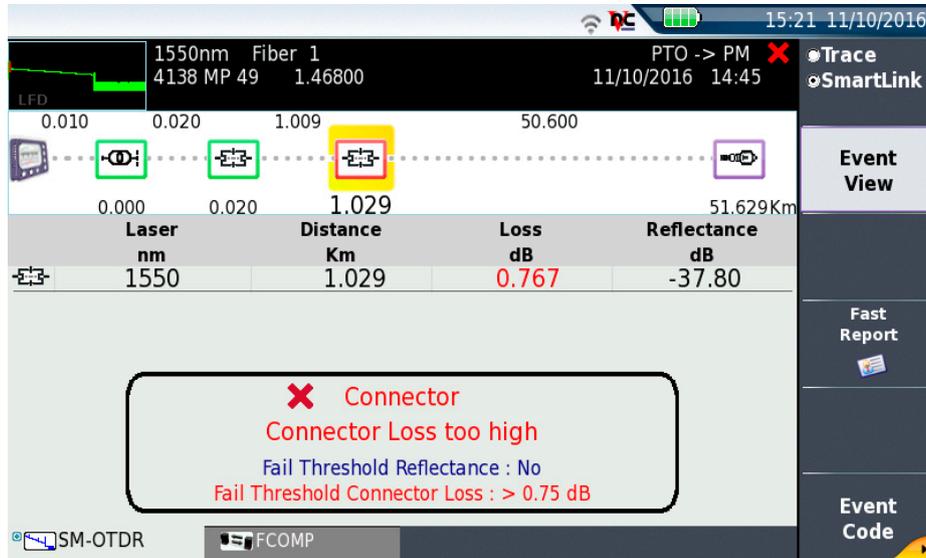

Specifications (Typical at 25°C)

General	
Weight	approx. 500 g (1.1 lbs)
Dimensions (w x h x d)	128 x 134 x 40 mm (5 x 5.28 x 1.58 in)
Laser safety class (21 CFR)	Class 1/1M
Distance units	Kilometer, meter, feet and miles
Group index range	1.30000 to 1.70000 in 0.00001 steps
Number of data points	up to 256,000 data points
Distance measurement	
Mode	Automatic or dual cursor
Display range	From 0.1 up to 400 km
Display resolution	1 cm
Sampling resolution	From 4 cm
Cursor Resolution	From 1cm
Accuracy	$\pm 0.75 \text{ m} \pm \text{sampling resolution} \pm 1.10 \cdot 10^{-5} * \text{Distance}$ (excluding group index uncertainties) *Time base controller/clock accuracy
Attenuation measurement	
Mode	Automatic, manual, 2-point, 5-point and LSA
Display range	1.25 dB to 55 dB
Display resolution	0.001 dB
Cursor resolution	From 0.001 dB
Linearity	$\pm 0.03 \text{ dB/dB}$
Threshold	0.01 to 5.99 dB in 0.01 dB step

Reflectance/ORL measurements	
Mode	Automatic or manual
Reflectance accuracy	±2 dB
Display resolution	0.01 dB
Threshold	-11 to -99 dB in 1 dB step

4100MP2 OTDR Modules	
Wavelength ¹	1310+/-20nm; 1550+/-20nm; 1625+/-10nm
Dynamic Range ²	45/43/43 dB
Pulsewidth	5 ns to 20 µs
Event Dead Zone ³	0.7 m
Attenuation Dead Zone ⁴	3 m
Power Meter	Calibrated wavelengths: 1310, 1490, 1550, 1625, 1650 nm Power range: -3 to -55 dBm Accuracy: +/- 0.5 dB @ -30 dBm
Continuous Wave Light Source	Wavelengths: same as OTDR Output power ⁵ : -3.5 dBm Stability: < +/-0.1dB @25°C over 1hour Operating modes: CW, 270Hz, 330Hz, 1kHz, 2kHz, Twintest

1. Laser at 25°C and measured at 10 µs
2. The one way difference between the extrapolated backscattering level at the start of the fiber and the RMS (SNR=1) noise level, after 3 minutes averaging and using the largest pulse-width
3. Measured at ±1.5 dB down from the peak of an unsaturated reflective event using the shortest pulse-width
4. Measured at ±0.5 dB from the linear regression using a FC/UPC reflectance and using the shortest pulse-width
5. Subtract 3dB when used in modulation mode (270/330/1k/2kHz)

Ordering Information (contact Viavi Solutions for additional references)

Part Number	Description
4100MP2 Modules	
E4126MP2-PC/-APC	1310/1550 nm MP2 OTDR Module
E4136MP2-PC/-APC	1310/1550/1625 nm MP2 OTDR Module
Options	
E41OTDRPM	Power meter option through the OTDR port
E41OTDRCR	Calibration report
Software Licenses (n=2, 4 or 5 per the TB/MTS platforms chosen)	
EOPTIPLS-nK	OPTIPULSES OTDR OPTION FOR T-BERD/MTS PLATFORMS
ESMARTLINK-nK	SOFTWARE LICENSE PROVIDING OPTIMIZED LINEAR TRACE VIEW OF FIBER UNDER TEST
Universal Optical Connectors	
EUSCADS, EUFCADS, EULCADS, EUSCADS-APC, EULCADS-APC	Connector adapters

For more information on the T-BERD/MTS-2000/-4000/-5800 test platforms, refer to their respective datasheets and brochures.



Contact Us **+1 844 GO VIAVI**
(+1 844 468 4284)

To reach the Viavi office nearest you,
visit viavisolutions.com/contacts.

© 2015 Viavi Solutions Inc.
Product specifications and descriptions in this document are subject to change without notice.
mp2otdr-ds-fop-nse-ae
30179970 900 1116