


Data Sheet

# VIAVI

## CellAdvisor 5G

Option F030 and F044 Specifications

VIAVI CellAdvisor™ 5G is the ideal field portable solution to validate 5G radio access.

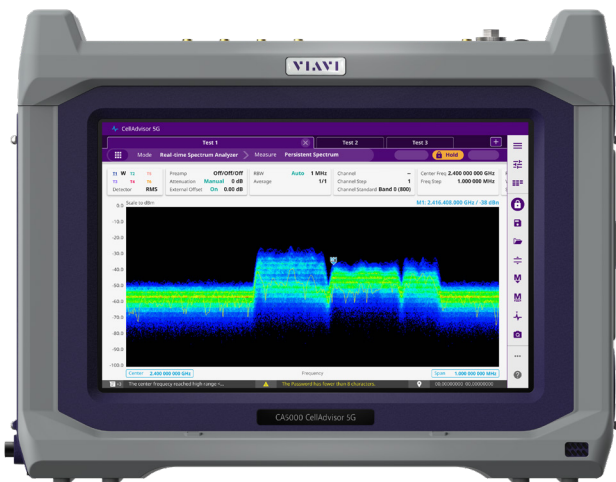

### Portable Real-Time Contiguous Spectrum Analyzer:

9 kHz to 30 GHz

9 kHz to 44 GHz

### Support for 5G NR Demodulation and Beamforming Analysis

Signal Analysis Bandwidth up to 100 MHz

Cable and antenna analysis up to 6 GHz\*

RF source\*

OTDR test for fronthaul, DAS and C-RAN\*\*\*

Interference hunting with InterferenceAdvisor software

### Specification\*\* Conditions

- CA5000 specifications apply under these conditions:
  - The instrument has been turned on for at least 15 minutes
  - The instrument is operating within a valid calibration period
  - Data with no tolerance are considered typical values
  - Typical and nominal values are defined as:
    - Typical: An average value of 80% performance of production units
    - Nominal: a general, descriptive term or parameter

\* Requires a CAA module. Refer to CAA06M Data Sheet

\*\*All specifications are subject to change without notice

\*\*\* Requires OTDR Module. Refer to 4100-Series OTDR Modules and DWDM OTDR Module datasheets

## Spectrum Analyzer (Standard)

### Frequency and time specifications

Option	Frequency range
Option F030	9 kHz to 30 GHz
Option F044	9 kHz to 44 GHz

### Frequency reference

Accuracy	±0.05 ppm (0 to 50°C (32 to 122°F)) + aging	
Accuracy with GPS	±25 ppb	GPS lock
	±50 ppb	Hold over (72 hours)
Aging	±0.5 ppm/year	
	±25 ppb with GPS	

### Frequency readout accuracy (start, stop, center, marker)

$\pm$  (readout frequency x frequency reference accuracy + RBW centering + 0.5 x horizontal resolution + 2 Hz)

horizontal resolution = frequency span/trace #, RBW centering = 15% x RBW

### Frequency span

Range	0 Hz (zero span), 9 kHz to max frequency of each option
Resolution	1 Hz
Accuracy	$\pm$ (2 x RBW centering + horizontal resolution)
Sweep time readout	The time required to complete a sweep from start to finish, including tuning, data acquisition and process

### Trace update

		Nominal
	15 trace/sec	Span= 260 MHz RBW 100 kHz

### Sweep time

		Nominal
Range	0.4 ms to 1000 s 24 $\mu$ s to 200 s	zero span
Accuracy	$\pm$ 2 %	zero span
Type	Continuous, Single	
Mode	Gated sweep (requires option S015), Normal, Fast	

### Trigger

Trigger source	Free run, Video, External
Trigger delay	Range: 0 to 200 s
	Resolution: 6 $\mu$ s

### Resolution bandwidth (RBW)

		Nominal
Range	1 Hz to 3 MHz	- 3 dB bandwidth 1-3-10 sequence
Accuracy	$\pm$ 10%	

### Video bandwidth (VBW)

		Nominal
Range	1 Hz to 3 MHz	- 3 dB bandwidth 1-3-10 sequence
Accuracy	$\pm$ 10%	

## Amplitude accuracy and range specifications

Amplitude range		
Measurement range	9 kHz to 18.5 GHz: DANL to +25 dBm	
	>18.5 GHz to 30 GHz: DANL to +20 dBm (Option 030)	
	>18.5 GHz to 44 GHz: DANL to +20 dBm (Option 044)	
Input attenuator range	9 kHz to 18.5 GHz: 0 to 55 dB in 5 dB steps	
	>18.5 GHz to 30 GHz: 0 to 50 dB in 5 dB steps (Option 030)	
	>18.5 GHz to 44 GHz: 0 to 50 dB in 5 dB steps (Option 044)	
Preamplifier		
Frequency range	Nominal	
	10 MHz to 30 GHz (Option 030)	
	10 MHz to 44 GHz (Option 044)	
Gain	20 dB	
Max RF input operating level		
	9 kHz to 18.5 GHz: +25 dBm, ±50 VDC	Average CW power
	>18.5 GHz to 30 GHz: +20 dBm, ±50 VDC (Option 030)	Average CW power
	>18.5 GHz to 44 GHz: +20 dBm, ±50 VDC (Option 044)	Average CW power
Display range		
Log/Linear scale	10 divisions	
	1 to 20 dB/Division in 1 dB	
Scale units	dBm, dBV, dBmV, dBµV, V, mV, W, mW	
Reference level		
Range	-150 to +100 dBm	
Resolution	Log scale: 0.1 dB	
	Linear scale: 1 % of reference level	
Trace		
Detectors	Normal, Positive peak, Negative peak, Sample, Average (RMS)	
Number of traces	6	
States	Clear/write, Maximum hold, Minimum hold, Capture, Load, Blank, Trace math, Trace info	
Functions	Time expired maximum hold and minimum hold, Trace math, Trace info	
Marker		
Type	Normal, Delta, Delta pair, Marker table	
Number of markers	6	
Functions	Noise marker	
Marker to ->	Peak, Next peak, Next peak right, Next peak left, Min search, Always peak Center, Start, Stop	
Audio beep	Tone change with signal strength	
Marker table	Display 6 markers	
Absolute amplitude accuracy		
Preamplifier off: input signal ≥ -50 dBm, auto-coupled, 15-minute warm-up		
Preamplifier on: -90 dBm < input signal < -50 dBm with >10 MHz frequency range, auto-coupled, 15-minute warm-up		
250 kHz to 6 GHz	± 1.0 dB, ± 0.5 dB (T)	20 to 30°C (68 to 86°F )
	± 2.0 dB, ± 1.2 dB (T)	-10 to 55°C (14 to 131°F )
>6 GHz to 18.5 GHz	± 1.5 dB, ± 0.5 dB (T)	20 to 30°C (68 to 86°F )
	± 2.5 dB, ± 1.2 dB (T)	-10 to 55°C (14 to 131°F )

>18.5 GHz to 30 GHz (Option 030)	± 1.5 dB, ± 0.8 dB (T)	20 to 30°C (68 to 86°F )
	± 3.0 dB, ± 1.5 dB (T)	-10 to 55°C (14 to 131°F )
>18.5 GHz to 44 GHz (Option 044)	± 1.5 dB, ± 0.8 dB (T)	20 to 30°C (68 to 86°F )
	± 3.0 dB, ± 1.5 dB (T)	-10 to 55°C (14 to 131°F )
<b>Input VSWR</b>	<b>Nominal</b>	
10 MHz to 22 GHz: 1.5:1	10 dB Attenuation with Normal Mode	
>22 GHz to 30 GHz: 1.7:1 (Option 030)		
>22 GHz to 44 GHz: 1.7:1 (Option 044)		

## Dynamic range specifications

### Displayed average noise level (DANL)

1 Hz RBW, 1 Hz VBW, 50 Ω termination, 0 dB attenuation, RMS detector

High Linear Mode (Preamplifier Off)	10 MHz to 8.0 GHz	-134 dBm, -139 dBm (T)	
	>8.0 GHz to 14.7 GHz	-130 dBm, -135 dBm (T)	
	>14.7 GHz to 18.5 GHz	-128 dBm, -134 dBm (T)	
	>18.5 GHz to 22.5 GHz	-125 dBm, -130 dBm (T)	
	>22.5 GHz to 30.0 GHz (Option 033)	-117 dBm, -122 dBm (T)	
	>22.5 GHz to 32.0 GHz (Option 044)	-117 dBm, -122 dBm (T)	
	>32.0 GHz to 40.0 GHz (Option 044)	-110 dBm, -117 dBm (T)	
	>40.0 GHz to 44.0 GHz (Option 044)	-105 dBm, -112 dBm (T)	
Normal Mode (Preamplifier Off)	10 MHz to 8.0 GHz	-137 dBm, -141 dBm (T)	
	>8.0 GHz to 14.7 GHz	-134 dBm, -138 dBm (T)	
	>14.7 GHz to 18.5 GHz	-131 dBm, -137 dBm (T)	
	>18.5 GHz to 30.0 GHz (Option 033)	-133 dBm, -137 dBm (T)	
	>18.5 GHz to 32.0 GHz (Option 044)	-133 dBm, -137 dBm (T)	
	>32.0 GHz to 40.0 GHz (Option 044)	-130 dBm, -137 dBm (T)	
	>40.0 GHz to 44.0 GHz (Option 044)	-125 dBm, -133 dBm (T)	
Preamplifier on	10 MHz to 8.0 GHz	-158 dBm, -161 dBm (T)	Preamp 1
	>8.0 GHz to 14.7 GHz	-155 dBm, -158 dBm (T)	Preamp 1
	>14.7 GHz to 18.5 GHz	-150 dBm, -153 dBm (T)	Preamp 1
	>18.5 GHz to 30.0 GHz	-158 dBm, -161 dBm (T)	Preamp 1
	>18.5 GHz to 32.0 GHz (Option 044)	-158 dBm, -161 dBm (T)	Preamp 1
	>32.0 GHz to 44.0 GHz (Option 044)	-148 dBm, -152 dBm (T)	Preamp 1
	10 MHz to 8.0 GHz	-163 dBm, -166 dBm (T)	Preamp 1 and 2
	>8.0 GHz to 14.7 GHz	-160 dBm, -163 dBm (T)	Preamp 1 and 2
	>14.7 GHz to 18.5 GHz	-157 dBm, -160 dBm (T)	Preamp 1 and 2
	>18.5 GHz to 30.0 GHz	-158 dBm, -163 dBm (T)	Preamp 1 and 2
	>18.5 GHz to 32.0 GHz (Option 044)	-158 dBm, -163 dBm (T)	Preamp 1 and 2
	>32.0 GHz to 44.0 GHz (Option 044)	-155 dBm, -160 dBm (T)	Preamp 1 and 2



Input-related spurious	0 dB attenuation, Preamp off Sweep tuned: Peak detector, Span < 1 GHz, 1 kHz RBW, 100 Hz VBW, Normal Mode, carrier offset > 5 MHz	
	9 kHz to 18.5 GHz Sweep tuned: -70 dBc	-25 dBm Input signal Typical
	>18.5 GHz to 30.0 GHz Sweep tuned: -65 dBc	-30 dBm input signal Typical
	>18.5 GHz to 33.0 GHz (Option 044) Sweep tuned: -65 dBc	-30 dBm input signal Typical
>33.0 GHz to 44.0 GHz (Option 044) Sweep tuned: -60 dBc	-30 dBm input signal Typical	
LO feedthrough to input	9 kHz to 18.5 GHz: <-80 dBm >18.8 GHz to 30 GHz: <-70 dBm (Option 030) >18.5 GHz to 44 GHz: <-70 dBm (Option 044)	
<b>Single sideband (SSB) phase noise</b>		
	-102 dBc/Hz, -105 dBc/Hz (T) @ 10 kHz offset -106 dBc/Hz, -109 dBc/Hz (T) @ 100 kHz offset -117 dBc/Hz, -120 dBc/Hz (T)	@ 1GHz, Input level -18 dBm, RMS detector, Normal Mode
<b>Measurements</b>		
Channel power	Channel power	
	Spectral density	
	PAR (Peak to average ratio)	
Occupied bandwidth	Occupied bandwidth	
	Integrated power	
	Occupied power	
	x dB bandwidth	
Spectrum emission mask	Reference power	
	Peak level at defined range	
	Reference power	
	Peak level at defined range	
Adjacent channel power (ACP)	Reference power	
	Absolute power at defined frequency offset	
	Relative power at defined frequency offset	
Multi-ACP (Adjacent channel power)	Reference power at lowest defined frequency	
	Reference power at highest defined frequency	
	Absolute power at defined frequency offset	
	Relative power at defined frequency offset	
Spurious emissions	Peak power at defined range	
	Frequency of peak power at defined range	
Total harmonic distortion	Power level at each harmonic	
	% of THD	
Field strength	Field strength power at markers	

## RF Power Meter (Standard)

General parameters	
Display range	-100 to +100 dBm
Offset range	0 to 60 dB
Resolution	0.01 dB or 0.1 x W (x = m, μ, p)
Internal RF power sensor	
Frequency range	Option F030: 10 MHz to 30 GHz
	Option F044: 10 MHz to 44 GHz
Span	1 kHz to max frequency of each option
Dynamic range	10 MHz to 18.5 GHz: -100 to +25 dBm
	>18.5 GHz to 30 GHz: -100 to +20 dBm (Option 030)
	>18.5 GHz to 44 GHz: -100 to +20 dBm (Option 044)
Maximum power	10 MHz to 18.5 GHz: +25 dBm
	>18.5 GHz to 30 GHz: +20 dBm (Option 030)
	>18.5 GHz to 44 GHz: +20 dBm (Option 044)
Accuracy	Same as spectrum analyzer

## External RF Power Sensor (Standard, requires external RF power sensor)

General parameters			
Display range	-100 to +100 dBm		
Offset range	0 to 60 dB		
Resolution	0.01 dB or 0.1 x W (x = m, μ, p)		
Directional power sensor			
Model	JD731B	JD733A	
Frequency range	300 MHz to 3.8 GHz	150 MHz to 3.5 GHz	
Dynamic range	Average: 0.15 to 150 W	Average: 0.1 to 50 W	
	Peak: 4 to 400 W	Peak: 0.1 to 50 W	
Measurement type	Forward/Reverse average power, Forward peak power, VSWR		
Accuracy	$\pm(4\% \text{ of reading} + 0.05 \text{ W})^{1,2}$		
Connector type	Type-N female on both ends		
Terminating power sensor			
Model	JD732B	JD734B	JD736B
Measurement type	Average	Peak	Average and Peak
Frequency range	20 MHz to 3.8 GHz		
Dynamic range	-30 to + 20 dBm		
Accuracy	$\pm 7\%$ <sup>1</sup>		
Connector type	Type-N female		

<sup>1</sup>CW condition at 15 to 35°C (59 to 95°F)

<sup>2</sup>Forward power

## GPS Connectivity with Antenna (Option S002)

GPS receiver type	
Built-in type	
GPS time and location	
GPS information	Latitude, Longitude, Satellite, Status, GPS Engine, Satellite view, ID, and C/N
GPS time and location	Time, Latitude, and Longitude on display Time, Latitude, and Longitude on trace
High-frequency accuracy	
GPS lock	±25 ppb
Hold over for 3 days	±50 ppb (0 to 50°C (32 to 122°F)) 15 minutes after satellite locked
Connector	SMA, female
Supplied antenna	SMA (m), 3.3 VDC or 5 VDC

## Bluetooth Connectivity (Option S003)

Interface type	Build-in type
Mode	File transfer profile (FTP)

## Wi-Fi Connectivity (Option S004)

Interface type	Build-in type
Interface standard	IEEE 802.11 b/g/n
Wireless mode	Infrastructure mode
Internet protocol version	IPv4, IPv6

## Real Time Spectrum Analyzer (Option S010 and S011)

Frequency range		
Option F030	9 kHz to 30 GHz	
Option F044	9 kHz to 44 GHz	
Frequency span		
Option S010	50 MHz real time	
Option S011	100 MHz real time	Supports panoramic persistence view up to 800 MHz analysis span
Acquisition		
IF bandwidth	50 MHz or 100 MHz	
A/D converter	245.76 Msps, 16 bits	
FFT lengths	8192	
Maximum acquisition time	1000 ms	
Minimum IQ resolution	8.138 ns	
Probability of intercept (POI)	33.59 us at normal 1.92 us at high	Span: 100 MHz



## Real Time Spectrum Analyzer (Option S010 and S011) continued

Spectrum display	
Trace detectors	Normal, Positive peak, Negative peak, Sample, Average (RMS)
Number of traces	6
Trace states	Clear/write, Maximum hold, Minimum hold, Capture, Load, Blank
Marker type	Normal, Delta, Delta pair, Marker table
Number of markers	6
Marker to ->	Peak, Next peak, Next peak right, Next peak left, Min search, Always peak Center, Start, Stop
Audio beep	Tone change with signal strength
Marker table	Display 6 markers
Persistence spectrum display	
Spectrum processing rate	≤ Max 15,000/s
Bitmap resolution	201 x 801
Marker information	Frequency, Amplitude, Signal density
Dwell time per step	100 ms to 100 s
Trace processing	Color-graded bitmap, +Peak, -Peak, Average
Trace length	801
Marker type	Normal, Delta, Marker table
Number of markers	6
Marker to ->	Peak, Next peak, Next peak right, Next peak left, Min search, Always peak Center, Start, Stop
Audio beep	Tone change with signal strength
Marker table	Display 6 markers
Persistence spectrogram display	
Trace detection	+Peak, -Peak, Average (RMS)
Trace length, Memory depth	
Time resolution per line	100 ms to 1 s, user selectable

## Interference Analyzer (S013)

Measurement	
Spectrum analyzer	Sound indicator, Interference ID, Spectrum recorder
Spectrogram	Collect up to 72 hours of data
RSSI	Collect up to 72 hours of data
Interference finder	
Radar chart	
Spectrum replayer	Playback recorded data using CA5000

## Route Map (S014)

Mode	Spectrum analyzer	
Plot method	Time, Position, GPS	
Plot legend	Excellent, Very good, Good, Poor	User definable range
Map type	Outdoor (position information embedded)	Import maps using VIAVI Mapcreator
	Indoor (no position information embedded)	Import maps using VIAVI Mapcreator
Measurements	RSSI, ACP, Peak search	

## Gated Sweep (S015)

Gated method	FFT
Gated delay range	0 to 100 ms
Gated length	1 us to 100 ms
Trigger source	External, Video and GPS

## Channel Scanner (S016)

Frequency range	Option F030: 10 MHz to 30 GHz
	Option F044: 10 MHz to 44 GHz
Measurement range	10 MHz to 18.5 GHz: -110 to +25 dBm
	>18.5 GHz to 30 GHz: -110 to +20 dBm (Option 030)
	>18.5 GHz to 44 GHz: -110 to +20 dBm (Option 044)
Measurements	>18.5 GHz to 44 GHz: -110 to +20 dBm (Option 044)
	Frequency scanner: 1 to 20 frequencies
	Customer scanner: 1 to 20 channels or frequencies

## LTE/LTE-A FDD Signal Analyzer (S032)

General Parameters		
Frequency range	Band 1 to 14, 17 to 26	
Minimum detectable level	-125 dBm	S-SS RSRP
Input signal level	-75 to +25 dBm	
Channel power accuracy	±1.0 dB (typical)	
Supported bandwidths	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, and 20 MHz	
Frequency error	±0.05 ppm	
Residual EVM	2.0% (typical)	@ -20 dBm
Measurements		
<b>Channel Power</b>	<b>Constellation</b>	
Channel power	MBSFN*	
Spectral density	RS power	
Peak to average ratio	PDSCH/Data* QPSK EVM	
<b>Occupied Bandwidth</b>	PDSCH/Data* 16 QAM EVM	
Occupied bandwidth	PDSCH/Data* 64 QAM EVM	
Integrated power	PDSCH/Data* 256 QAM EVM	
Occupied power	Data EVM RMS	
<b>Spectrum Emission mask</b>	Data EVM peak	
Reference power	Frequency error	
Peak level at defined range	Time Error	
<b>ACLR</b>	<b>Data Channel</b>	
Reference power	Physical Cell ID, Group ID, Sector ID	
Absolute power at defined range	MBSFN*	
Relative power at defined range	Resource block power	
<b>Multi-ACLR</b>	I-Q diagram	
Lowest reference power	Resource block power	
Highest reference power	Modulation power, IQ origin offset	
Absolute power at defined range	EVM RMS, EVM peak	
Relative power at defined range	<b>Control Channel</b>	
<b>Spurious Emissions</b>	Physical Cell ID, Group ID, Sector ID	
Peak frequency at defined range	MBSFN*	
Peak level at defined range	EVM, relative or absolute power, modulation type for P-SS, S-SS, PCFICH, PHICH, PDCCH, RS, MBSFN RS*	
<b>Power vs. Time (frame)</b>	Each control channels'	
Frame average power	IQ diagram, Modulation format, Frequency error, IQ origin offset, EVM RMS, EVM peak	
I-Q origin offset, Time Offset		
Subframe power	<b>Subframe</b>	
First slot power	Physical Cell ID, Group ID, Sector ID	
Second slot power	MBSFN*	
Physical Cell ID, Group ID, Sector ID	Subframe power	
	Channel summary table EVM, relative or absolute power, modulation type for P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN RS* Data QPSK, 16/64/256 QAM	
	Subframe summary OFDM symbol power, Frequency error, time error Data EVM RMS, data EVM peak, RS EVM RMS, RS EVM peak IQ Imbalance	

## LTE/LTE-A FDD Signal Analyzer (S032) continued

Measurements continued		
Frame	Carrier Aggregation	Control Channel
Physical Cell ID, Group ID, Sector ID	Component carriers: up to 5	Physical Cell ID, Group ID, Sector ID
MBSFN*	Subframe, P-SS, S-SS, PBCH, RS power	MBSFN*
Frame power	Data QPSK, 16/64/256 QAM power	RS/EVM power trend
Channel summary table EVM, relative or absolute power, modulation type for P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN RS* PBSCH/PMCH QPSK, 16/64/256 QAM	MBSFN RS power*	Control channel table
	Subframe, P-SS, S-SS, PBCH, RS EVM	Absolute power, EVM, phase for P-SS, S-SS, PBCH, PCFICH, RS0, RS1, RS2, RS3
	Data QPSK, 16/64/256 QAM EVM	Frequency error
	MBSFN RS EVM*	Time alignment error
	MBSFN*, Physical Cell ID	Time offset
	Frequency error, time alignment error	
Subframe summary OFDM symbol power, Frequency error, IQ-origin offset, Data EVM RMS, Data EVM peak EVM RMS, EVM peak	Antenna port	<b>Datagram</b>
	<b>Power Statistics CCDF</b>	Datagram
	Average power	Resource block power
	Max power	Data utilization
<b>Time Alignment Error</b>	Crest factor	Resource block allocation
	<b>OTA Channel Scanner (up to 6)</b>	<b>Route Map</b>
Time alignment error trend	Frequency or channels	RSRP, RSRQ, RS-SINR, S-SS RSSI
Time alignment error	Physical Cell ID, Group ID, Sector ID	P-SS,/S-SS power, S-SS Ec/Io
RS power difference	Channel power, RSSI, RSRP, RSRQ	
Antenna 0 RS power, EVM, time difference	RS-SINR, Antenna port	
Antenna 1 RS power, EVM, time difference	<b>OTA ID Scanner (up to 6)</b>	
Antenna 2 RS power, EVM, time difference	RSRP, RSRQ dominance	
Antenna 3 RS power, EVM, time difference	S-SS RSSI, S-SS Ec/Io dominance	
<b>Data Allocation Map</b>	Physical Cell ID, Group ID, Sector ID	
	Antenna 0 RS Ec/Io, delay	
	Antenna 1 RS Ec/Io, delay	
Frame data utilization	RSRP, RSRQ, RS-SIN, S-SS RSSI, P-SS, S-SS, S-SS Ec/Io	
OFDM symbol power	<b>Multipath Profile</b>	
Data allocation vs frame	Physical Cell ID, Group ID, Sector ID	
Subframe data utilization	Antenna 2 RS Ec/Io, delay	
Resource block power	Antenna 3 RS Ec/Io, delay	
Data allocation vs subframe		

\*Measurement is performed when MBMS is enabled

## LTE/LTE-A TDD Signal Analyzer (S033)

General Parameters		
Frequency range	Band 33 to 43	
Minimum detectable level	-125 dBm	S-SS RSRP
Input signal level	-75 to +25 dBm	
Channel power accuracy	±1.0 dB (typical)	
Supported bandwidths	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, and 20 MHz	
Frequency error	±0.05 ppm	
Residual EVM	2.0% (typical)	@ -20 dBm
Measurements		
<b>Channel Power</b>		<b>Constellation</b>
Channel power	MBSFN*	
Spectral density	RS power	
Peak to average ratio	PDSCH/Data* QPSK EVM	
<b>Occupied Bandwidth</b>		PDSCH/Data* 16 QAM EVM
Occupied bandwidth	PDSCH/Data* 64 QAM EVM	
Integrated power	PDSCH/Data* 256 QAM EVM	
Occupied power	Data EVM RMS	
<b>Spectrum Emission mask</b>		Data EVM peak
Reference power	Frequency error	
Peak level at defined range	Time error	
<b>ACLR</b>		<b>Data Channel</b>
Reference power	Physical Cell ID, Group ID, Sector ID	
Absolute power at defined range	MBSFN*	
Relative power at defined range	Resource block power	
<b>Multi-ACLR</b>		I-Q diagram
Lowest reference power	Resource block power	
Highest reference power	Modulation power, IQ origin offset	
Absolute power at defined range	EVM RMS, EVM peak	
Relative power at defined range	<b>Control Channel</b>	
<b>Spurious Emissions</b>		Physical Cell ID, Group ID, Sector ID
Peak frequency at defined range	MBSFN*	
Peak level at defined range	EVM, relative or absolute power, modulation type for P-SS, S-SS, PCFICH, PHICH, PDCCH, RS, MBSFN RS*	
<b>Power vs. Time (frame)</b>		Each control channels'
Frame average power	IQ diagram, Modulation format,	
I-Q origin offset, Time Offset	Frequency error, IQ origin offset,	
Subframe power	EVM RMS, EVM peak	
First slot power	<b>Subframe</b>	
Second slot power	Physical Cell ID, Group ID, Sector ID	
Physical Cell ID, Group ID, Sector ID	MBSFN*	
<b>Power vs. Time (slot)</b>		Subframe power
Slot average power	Channel summary table	
Transition period length	EVM, relative or absolute power, modulation type for P-SS, S-SS,	
Off Power	PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN RS*	
Physical Cell ID, Group ID, Sector ID	Data QPSK, 16/64/256 QAM	

\*Measurement is performed when MBMS is enabled

## LTE/LTE-A TDD Signal Analyzer (S033) continued

<b>Measurements continued</b>	
Subframe summary OFDM symbol power, Frequency error, time error Data EVM RMS, data EVM peak, RS EVM RMS, RS EVM peak IQ Imbalance	<b>Power Statistics CCDF</b> Average power Max power Crest factor
<b>Frame</b>	<b>OTA Channel Scanner (up to 6)</b> Frequency or channels
Physical Cell ID, Group ID, Sector ID	Physical Cell ID, Group ID, Sector ID
MBSFN*	Channel power, RSSI, RSRP, RSRQ
Frame power	RS-SINR, Antenna port
Channel summary table EVM, relative or absolute power, modulation type for P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN RS* PBSCH/PMCH QPSK, 16/64/256 QAM	<b>OTA ID Scanner (up to 6)</b> RSRP, RSRQ dominance S-SS RSSI, S-SS Ec/Io dominance Physical Cell ID, Group ID, Sector ID RSRP, RSRQ, RS-SIN, S-SS RSSI, P-SS, S-SS, S-SS Ec/Io
Subframe summary OFDM symbol power, Frequency error, IQ-origin offset, Data EVM RMS, Data EVM peak EVM RMS, EVM peak	<b>Multipath Profile</b> Physical Cell ID, Group ID, Sector ID Antenna 0 RS Ec/Io, delay Antenna 1 RS Ec/Io, delay Antenna 2 RS Ec/Io, delay Antenna 3 RS Ec/Io, delay
<b>Time Alignment Error</b>	<b>Control Channel</b>
Time alignment error trend	Physical Cell ID, Group ID, Sector ID
Time alignment error	MBSFN*
RS power difference	RS/EVM power trend
Antenna 0 RS power, EVM, time difference	Control channel table Absolute power, EVM, phase for P-SS, S-SS, PBCH, PCFICH, RS0, RS1, RS2, RS3
Antenna 1 RS power, EVM, time difference	
Antenna 2 RS power, EVM, time difference	
Antenna 3 RS power, EVM, time difference	
<b>Data Allocation Map</b>	
Frame data utilization	Frequency error
OFDM symbol power	Time alignment error
Data allocation vs frame	Time offset
Subframe data utilization	<b>Datagram</b>
Resource block power	Datagram
Data allocation vs subframe	Resource block power
<b>Carrier Aggregation</b>	Data utilization
Component carriers: up to 5	Resource block allocation
Subframe, P-SS, S-SS, PBCH, RS power	<b>Route Map</b>
Data QPSK, 16/64/256 QAM power	RSRP, RSRQ, RS-SINR, S-SS RSSI
MBSFN RS power*	P-SS,/S-SS power, S-SS Ec/Io
Subframe, P-SS, S-SS, PBCH, RS EVM	
Data QPSK, 16/64/256 QAM EVM	
MBSFN RS EVM*	
MBSFN*, Physical Cell ID	
Frequency error, time alignment error	
Antenna port	

\*Measurement is performed when MBMS is enabled

## DSS Signal Analyzer (S034)

General parameters		
Frequency range	LTE FDD: Band 1 to 14, 17 to 26 LTE TDD: Band 33 to 43	
Minimum detectable level	LTE: -125 dBm NR: -110 dBm	S-SS RSRP S-SS RSRP
Input signal level	FR1 Band: -75 to +25 dBm	
Channel power accuracy	±1.0 dB (typical)	
Supported bandwidth	5 MHz, 10 MHz, 15 MHz, and 20 MHz	
Frequency error	±0.05 ppm	
Residual EVM	2.0 % (typical)	@ -20 dBm
Measurement		
<b>Channel Power</b>		<b>Constellation</b>
Channel power		RS power
Spectral density		PBCH DMRS power
Peak to average power		PDSCH LTE/NR QPSK EVM
<b>Occupied bandwidth</b>		PDSCH LTE/NR 16 QAM EVM
Occupied bandwidth		PDSCH LTE/NR 64 QAM EVM
Integrated power		PDSCH LTE/NR 256 QAM EVM
Occupied power		LTE/NR Data EVM RMS, peak
<b>Spectrum Emission mask</b>		Frequency Error, Time error
Reference power		<b>Channel Mapper</b>
Peak level at defined range		LTE channels' allocation in RB block P-SS, S-SS, PBCH, RS, PDCCH, PDSCH, PCFICH, PHICH
<b>ACLR</b>		NR channels' allocation in RB block P-SS, S-SS, PBCH, PBCH DMRS, PDCCH, PDSCH
Reference power		LTE/NR Physical cell ID, Group ID, Sector ID
Abs power at defined range		<b>Control Channel</b>
Rel power at defined range		Subframe power
<b>Multi-ACLR</b>		Channel summary on EVM, power and mod. type LTE control channels (P-SS, S-SS, PBCH, PCFICH PHICH, PDCCH, RS) NR control Channels (P-SS, S-SS, PBCH DMRS, PBCH, PDCCH DMRS, PDCCH)
Lowest reference power		Each control channel's IQ diagram, Modulation format, Frequency error, IQ origin offset, EVM RMS, EVM peak
Highest reference power		LTE/NR Physical cell ID, Group ID, Sector ID
Abs power at defined range		
Rel power at defined range		
<b>Spurious Emissions</b>		
Peak frequency at defined range		
Peak level at defined range		
<b>Power vs. Time (frame)</b>		
Frame average power		
I-Q origin offset, Time offset, Subframe power, First slot power, Second slot power		
LTE Physical cell ID, Group ID, Sector ID		
<b>Power vs. Time (Slot)</b>		
Slot average power		
Transition period length		
Off power		
LTE Physical cell ID, Group ID, Sector ID		

## DSS Signal Analyzer (S034) continued

<b>Measurements continued</b>	
<b>Subframe</b>	<b>OTA Channel Scanner (up to 3)</b>
Subframe power	Channel power and RSRP bar graph
Channel summary on EVM, power and mod. type LTE control channels (P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS) and data channels of QPSK, 16 QAM, 64 QAM, 256 QAM NR control Channels (P-SS, S-SS, PBCH, PBCH DMRS, PDCCH, PDCCH DMRS, PDSCH DMRS) and data channels of QPSK, 16 QAM, 64 QAM, 256 QAM	LTE: PCI, RS RSSI, RS RSRP, RS RSRQ, RS SINR
	NR: PCI, P-SS RSSI, P-SS RSRP, P-SS RSRQ, P-SS SINR
	<b>OTA ID Scanner (up to 6)</b>
Subframe summary OFDM symbol power, Frequency error, Time error, LTE/NR Data EVM RMS, peak, RS EVM RMS, peak, IQ imbalance	LTE: PCI, RSRP, RSRQ, P-SS SNR, S-SS SINR, S-SS RSSI, P-SS, S-SS, S-SS Ec/Io
	NR: PCI, SSB index, S-SS RSRP, P-SS RSRP, S-SS SINR, S-SS RSRQ
LTE/NR Physical cell ID, Group ID, Sector ID	<b>OTA Multipath Profile</b>
<b>Frame</b> Frame avg power	LTE: RS0, RS1, RS2, RS3 Ec/Io, Delay
	NR: P-SS, S-SS Ec/Io, Delay
	LTE/NR Physical Cell ID, Group ID, Sector ID
Channel summary on EVM, power and mod. type LTE control channels (P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS) and data channels of QPSK, 16 QAM, 64 QAM, 256 QAM NR control Channels (P-SS, S-SS, PBCH, PBCH DMRS, PDCCH, PDCCH DMRS, PDSCH DMRS) and data channels of QPSK, 16 QAM, 64 QAM, 256 QAM	<b>OTA Control Channel</b>
	LTE: P-SS, S-SS, PBCH, RS power and EVM
	NR: P-SS, S-SS, PBCH power and EVM
Frame summary OFDM symbol power, Frequency error, Time error, LTE/NR Data EVM RMS, peak, RS EVM RMS, peak	Frequency error, Time error,
	Time alignment error
	LTE/NR Physical Cell ID, Group ID, Sector ID
LTE/NR Physical cell ID, Group ID, Sector ID	<b>OTA Route map</b>
	RSPR, RSRP, SINR, SNR, PCI
	<b>Freq/Time Error Variation</b>
	Frequency error trend
	Time error trend
	RS0, RS1, RS2, RS3 power trend
<b>Time Alignment Error</b>	
Time alignment error trend	
Time alignment error, RS power difference	
Antenna 0 LTE RS power, EVM, time difference	
Antenna 1 LTE RS power, EVM, time difference	
Antenna 2 LTE RS power, EVM, time difference	
Antenna 3 LTE RS power, EVM, time difference	
Antenna NR PSS power, EVM, time difference	
LTE/NR Physical cell ID, Group ID, Sector ID	



## 5G NR Signal Analyzer (S041)

General parameters		
Frequency range	FR1 Band: 410 MHz to 7.125 GHz FR2 Band: 24 GHz to 44 GHz	
Minimum detectable level	FR1 Band: -120 dBm FR2 Band: -110 dBm	SS-RSRP SS-RSRP
Input signal level	FR1 Band: -75 to +25 dBm FR2 Band: -70 to +20 dBm	
Channel power accuracy	±1.0 dB typical	
Supported bandwidth	Up to 100 MHz	
Frequency error	±0.05 ppm	
Residual EVM	2.0 % typical	@ -20 dBm
Measurements		
<b>Channel power</b> Channel power/EIRP power Spectral density Peak to average power	<b>Power vs. time</b> Frame average power Subframe power Slot average power Transient period length Off power level	<b>Channel scanner (up to 8)</b> Channel scanner bar SS-RSRP Channel power <b>Channel scanner summary</b> Cell ID Center frequency SS-RSRP/SS-RSRQ Channel power SS-RSRP SS-RSRQ
<b>Occupied bandwidth</b> Occupied bandwidth Integrated power Occupied power	<b>Constellation</b> PDSCH/Data QPSK EVM PDSCH/Data 16QAM EVM PDSCH/Data 64QAM EVM PDSCH/Data 256QAM EVM Data EVM RMS, Peak Frequency error	<b>Beam scanner (up to 8)</b> <b>Beam scanner bar</b> Cell ID/Beam index SS-RSRP SS-RSRQ PSS/SSS power
<b>Spectrum emission</b> Reference power Peak level at defined range		
<b>ACLR</b> Reference power Abs power at defined range Rel power at defined range		<b>Beam scanner summary</b> Cell, Group, Sector ID Beam index SS-RSRP SS-RSRQ PSS/SSS power
<b>Multi-ACLR</b> Lowest reference power Highest reference power Abs power at defined range Rel power at defined range		
<b>Spurious emissions</b> Peak frequency at defined range Peak level at defined range		<b>Route map</b> SS-RSRP SS-RSRQ PSS power SSS Power

## 5G TM Signal Analyzer (S042)

General parameters		
Frequency range	FR1 Band: 410 MHz to 7.125 GHz FR2 Band: 24 GHz to 44 GHz	
Input signal level	FR1 Band: -75 to +25 dBm FR2 Band: -70 to +20 dBm	
Channel power accuracy	±1.0 dB (typical)	
Supported bandwidth	Up to 100 MHz	
Frequency error	±0.05 ppm	
Residual EVM	2.0 % (typical)	@ -20 dBm
Standard	3GPP TS 38 series v15.2.0	
Measurements		
<b>BS output power</b> BS output power/EIRP power Spectral density Peak to average power	<b>Transmit on/off power</b> Symbol average power Transition period length Off power	
<b>Occupied bandwidth</b> Occupied bandwidth Integrated power Occupied power	<b>Modulation Quality</b> PDSCH QPSK EVM PDSCH 16QAM EVM PDSCH 64QAM EVM PDSCH 256QAM EVM Frequency error	
<b>ACLR</b> Reference power Abs power at defined range Rel power at defined range	<b>MIMO Time Alignment Error</b> Time alignment error PDSCH DM-RS power difference Antenna 1000: PDSCH DM-RS power, Time offset Antenna 1001: PDSCH DM-RS power, Time offset Antenna 1000/1001 Time offset trend	
<b>Multi-ACLR</b> Lowest reference power Highest reference power Abs power at defined range Rel power at defined range	<b>CA time Alignment Error (up to 8 carriers)</b> Time alignment error trend Time alignment error PDSCH DM-RS power difference PDSCH DM-RS power, Time offset	
<b>Operation band unwanted emissions</b> Reference power Peak level at defined range		
<b>Transmitter spurious emissions</b> Peak frequency at defined range Peak level at defined range		

## NSA Analyzer (S043)

General parameters		
Frequency range	LTE-FDD: Band 1 to 14, 17 to 26 LTE-TDD: Band 33 to 43 NR: FR1 Band: 410 MHz to 7.125 GHz FR2 Band: 24 GHz to 44 GHz	
Minimum detectable level	LTE: -125 dBm NR: FR1 Band: -120 dBm FR2 Band: -110 dBm	SS-RSRP  SS-RSRP SS-RSRP
Input signal level	FR1: -75 to +25 dBm FR2: -70 to +20 dBm	
Channel power accuracy	±1.0 dB (typical)	
Supported bandwidth	Up to 100 MHz	
Frequency error	±0.05 ppm	
Residual EVM	2.0 % (typical)	@ -20 dBm
Measurements		
<b>NSA Analyzer</b> Up to 8 LTE/NR carriers Fast mode: Strongest PCI Normal mode: Multi PCIs NR Analyzer Cell ID/SSB index SS-RSRP/PS-RSRP PS-SNR/SS-SINR/SS-RSRQ LTE Analyzer Cell ID RSRP,RSRQ,PS-SNR,SS-SINR S-SS RSSI, P-SS,S-SS, S-SS Ec/Io	<b>NSA Scanner</b> Up to 8 LTE/NR carriers Fast mode NR scanner Strongest Cell ID SS-RSRP/Channel power LTE scanner Strongest Cell ID RSRP/Channel power Normal mode NR scanner Strongest Cell ID/SSB index SS-RSRP/Channel power PBCH EVM Frequency error, Time error LTE scanner Strongest Cell ID RSRP/Channel power RS EVM Frequency error, Time error	<b>Route map</b> Up to 8 LTE/NR carriers Fast mode: Strongest PCI Normal mode: Multi PCIs NR Analyzer Cell ID/SSB index SS-RSRP/PS-RSRP PS-SNR/SS-SINR/SS-RSRQ LTE Analyzer Cell ID RSRP,RSRQ,PS-SNR,SS-SINR S-SS RSSI, P-SS,S-SS,S-SS Ec/Io

## General Information

<b>RF in</b>		
Connector type	9 kHz to 18.5 GHz: Type-N female	
	9 kHz to 30 GHz, Type-N female/2.92 mm male (Option 030)	
	9 kHz to 44 GHz, Type-N female/2.92 mm male (Option 044)	
Impedance	50 $\Omega$	Nominal
Damage level	+27 dBm, $\pm$ 50 VDC	Average CW power
<b>Trigger in/out, GPS</b>		
Connector type	SMA, female	
Impedance	50 $\Omega$ nominal	
<b>Reference clock in/out</b>		
Connector type	SMA, female	
Impedance	50 $\Omega$ nominal	
Frequency	10 MHz, 13 MHz, 15 MHz	
Input range	-5 to +5 dBm	
<b>USB</b>		
USB host	Type A, 2 ports USB2.0	
USB client	Mini USB, 1 port	
	Used for SCPI programming, USBTMC, and connection to AppSW	
<b>SFP cage with optic HW</b>		
Port1	SFP/SFP+ compatible	
Port2	SFP/SFP+ compatible	
LAN	RJ45, 100/1000 Base-T	
<b>LAN</b>		
RJ45, 1000 Base-T		
Used for SCPI programming, remote control and connection to AppSW		
<b>Audio jack</b>		
3.5 mm headphone jack		
Built-in speaker		
<b>Display</b>		
Type	10" capacitive touch screen	
Resolution	1280 x 800	
<b>Power</b>		
Connector	Rectangular DC jack	
External DC input	19 VDC	
Power consumption	Option F030: 67 W	
	Option F044: 67 W	

## General Information continued

<b>Battery</b>		
Type	14.4 V, 6800 mAh (Lithium ion)	Accepts two batteries
Operating time	Option F030 standard (one battery): > 1:30 hrs optional (two batteries): > 3:00 hrs	Typical Typical
	Option F044 standard (one battery): > 1:30 hrs optional (two batteries): > 3:00 hrs	Typical Typical
	New battery with fully charged battery	
Charging time	100 % charging Standard (one battery): > 2:30 hrs Optional secondary battery: > 4:30 hrs	
	Up to 80 % charging Standard (one battery): > 1:40 hrs Optional secondary battery: > 3:20 hrs	
Charging temperature	0 to 45°C (32 to 113°F) ≤ 85% RH	
Discharging temperature	-20 to 55°C (-4 to 131°F) ≤ 85% RH	
Storage temperature	-20 to 60°C (-4 to 140°F)	
<b>Operating temperature</b>		
AC power	0 to 40°C (32 to 104°F)	Battery charging
Battery	-10 to 55°C (14 to 131°F)	Without optic HW
	-10 to 40°C (14 to 104°F)	With optic HW
<b>Storage temperature</b>		
-20 to 60 °C (-4 to 140 °F)		
<b>Maximum humidity</b>		
95% RH (noncondensing)		
<b>Memory</b>		
Internal	Maximum 4 GB	
External	Limited by size of USB/SD flash drive	
	SD card (not supplied), size ≤ 32 Gbyte	
<b>Data storage</b>		
Internal	> 1000 instrument setups and traces	
External	> 5000 instrument setups and traces	
<b>Environmental</b>		
Vibration	MIL-PRF-28800F Class 2	
Shock	MIL-PRF-28800F	
Bench handling	MIL-PRF-28800F	
Transit drop	MIL-PRF-28800F Class 2	
<b>EMC</b>		
IEC/EN 61326-1:2006 (complies with European EMC)		
CISPR11:2009 +A1:2010		
<b>ESD</b>		
IEC/EN 61000-4-2		

## General Information continued

<b>Size and weight (Standard configuration)</b>	
Weight (with one battery)	Option F030: <5.7 kg (12.56 lb.)
	Option F044: <5.7 kg (12.56 lb.)
Size (W x H x D)	309 mm x 241 mm x 113 mm with top bumper
	309 mm x 225 mm x 113 mm without top bumper
<b>Warranty</b>	
3 years	
<b>Recommended calibration cycle</b>	
1 year	

## Ordering Information

Part number	Description
CA5000	CellAdvisor 5G Includes: Spectrum analyzer, RF power meter
<b>Internal hardware option</b>	
CA5000-F030	Frequency 9 kHz to 30 GHz with two RF ports
CA5000-F044	Frequency 9 kHz to 44 GHz with two RF ports
<b>Hardware upgrade options</b>	
CA5000-FU30	Frequency upgrade to 30 GHz with two RF ports
CA5000-FU44	Frequency upgrade to 44 GHz with two RF ports
<b>Bandwidth range</b>	
CA5000-B100	100 MHz/100 MHz analysis bandwidth
<b>Options</b>	
CA5000-S002	GPS connectivity with antenna
CA5000-S003	Bluetooth connectivity
CA5000-S004	Wi-Fi connectivity
CA5000-S010	50 MHz bandwidth real time spectrum analyzer
CA5000-S011	100 MHz bandwidth real time spectrum analyzer
CA5000-S013	Interference analyzer
CA5000-S014	Route map
CA5000-S015	Gated sweep
CA5000-S016	Channel scanner
CA5000-S032	LTE/LTE-A FDD signal analyzer
CA5000-S033	LTE/LTE-A TDD signal analyzer
CA5000-S034	DSS Signal Analyzer
CA5000-S041	5G NR signal analyzer
CA5000-S042	5G NR TM signal analyzer
CA5000-S043	5G NSA analyzer
CA5000-S044	5G PDSCH analysis
SAA-ADVISOR	Smart Access Anywhere for CellAdvisor products

## Optional Accessories

Accessory - RF cables	
G700050530	RF cable DC to 8 GHz Type-N(m) to Type-N(m), 1.0 m
G700050531	RF cable DC to 8 GHz Type-N(m) to Type-N(f), 1.5 m
G700050532	RF cable DC to 8 GHz Type-N(m) to Type-N(f), 3.0 m
G710050533	RF cable DC to 18 GHz Type-N(m) to SMA(m), 1.5 m
G710050534	RF cable DC to 18 GHz Type-N(m) to QMA(m), 1.5 m
G710050535	RF cable DC to 18 GHz Type-N(m) to SMB(m), 1.5 m
G710050536	RF cable DC to 6 GHz Type-N(m) to DIN(f), 1.5 m
G710050537	RF cable DC to 4 GHz Type-N(m) to 1.0/2.3 (m), 1.5 m
G700050540	Phase-stable RF cable w grip DC to 6 GHz Type-N(m) to Type-N(f), 1.5 m
G700050541	Phase-stable RF cable w grip DC to 6 GHz Type-N(m) to DIN(f), 1.5 m
G710050531	RF cable DC to 18 GHz Type-N(m) to Type-N(f), 1.5 m
G700050550	RF cable DC to 40 GHz, K(m) to K(m), 0.8 m
G700050551	RF cable DC to 40 GHz, K(m) to K(f), 0.8 m
G700050552	RF cable DC to 40 GHz, K(m) to K(f), 1.5 m
Accessory - RF antennas	
G700050340	Mag mount RF omni antenna Type-K(f), 26 GHz to 40 GHz
G700050342	Mag mount RF omni antenna with LNA; Type-K(f); 26 GHz to 40 GHz
G700050344	Mag mount RF omni antenna SMF(f), 600 MHz to 6 GHz
G700050350	RF omni antenna Type-N(m); 3300 to 3800 MHz
G700050353	RF omni antenna Type-N(m), 806 to 896 MHz
G700050354	RF omni antenna Type-N(m), 870 to 960 MHz
G700050355	RF omni antenna Type-N(m), 1710 to 2170 MHz
G700050356	RF omni antenna Type-N(m), 720 to 800 MHz
G700050357	RF omni antenna Type-N(m), 2300 to 2700 MHz
G700050363	RF yagi antenna Type-N(f), 1750 to 2390 MHz, 10.2 dBd
G700050365	RF yagi antenna Type-N(f), 866 to 960 MHz, 9.8 dBd
G700050366	RF yagi antenna SMA(f), 700 to 4000 MHz, 1.85 dBd
G700050367	RF yagi antenna SMA(f), 700 to 6000 MHz, 2.85 dBd
G700050370	RF directional horn antenna kit, K(f), 26.5 GHz to 40 GHz, 20 dBi
G700050390	GPS SMA mount antenna
Accessory - RF adapters	
G700050572	Adapter DIN(m) to DIN(m), DC to 7.5 GHz, 50 ohm
G700050573	Adapter Type-N(m) to SMA(f) DC to 18 GHz, 50 ohm
G700050574	Adapter Type-N(m) to BNC(f), DC to 4 GHz, 50 ohm
G700050575	Adapter Type-N(f) to Type-N(f), DC to 18 GHz 50 ohm
G700050576	Adapter Type-N(m) to DIN(m), DC to 7.5 GHz, 50 ohm
G700050577	Adapter Type-N(f) to DIN(f), DC to 7.5 GHz, 50 ohm
G700050578	Adapter Type-N(f) to DIN(m), DC to 7.5 GHz, 50 ohm
G700050579	Adapter DIN(f) to DIN(f), DC to 7.5 GHz, 50 ohm
G700050580	Adapter Type-N(m) to Type-N(m), DC to 11 GHz 50 ohm
G700050581	Adapter N(m) to QMA(f), DC to 6.0 GHz, 50 ohm
G700050582	Adapter N(m) to QMA(m), DC to 6.0 GHz, 50 ohm



## Optional Accessories continued

G700050583	Adapter N(m) to 4.1/9.5 MINI DIN(f), DC to 6.0 GHz, 50 ohm
G700050584	Adapter N(m) to 4.1/9.5 MINI DIN(m), DC to 6.0 GHz, 50 ohm
G700050585	Adapter N(m) to 4.3-10(f), DC to 6.0 GHz, 50 ohm
G700050586	Adapter N(m) to 4.3-10(m), DC to 6.0 GHz, 50 ohm
G700050587	Adapter N(f) to SMA(f), DC to 18 GHz, 50 ohm
<b>Accessory - RF filters</b>	
G700050601	Bandpass filter 696 MHz to 716 MHz, N(m) to N(f), 50 ohm
G700050602	Bandpass filter 776 MHz to 788 MHz, N(m) to N(f), 50 ohm
G700050603	Bandpass filter 806 MHz to 849 MHz, N(m) to N(f), 50 ohm
G700050604	Bandpass filter 1710 MHz to 1755 MHz, N(m) to N(f), 50 ohm
G700050605	Bandpass filter 1850 MHz to 1910 MHz, N(m) to N(f), 50 ohm
G700050606	Bandpass filter 703 MHz to 748 MHz, N(m) to N(f), 50 ohm
G700050607	Bandpass filter 832 MHz to 862 MHz, N(m) to N(f), 50 ohm
G700050608	Bandpass filter 880 MHz to 915 MHz, N(m) to N(f), 50 ohm
G700050609	Bandpass filter 1710 MHz to 1785 MHz, N(m) to N(f), 50 ohm
G700050610	Bandpass filter 1920 MHz to 1980 MHz, N(m) to N(f), 50 ohm
G700050611	Bandpass filter 2500 MHz to 2570 MHz, N(m) to N(f), 50 ohm
G700050612	Bandpass filter 663 MHz to 698 MHz, N(m) to N(f), 50 ohm
G700050613	Bandpass filter 3300 MHz to 3800 MHz, N(m) to N(f), 50 ohm
<b>Accessory - RF power sensors</b>	
JD731B	Directional power sensor (peak and average power) 300 to 3800 MHz
JD732B	Terminating power sensor (Average Power) 20 to 3800 MHz
JD733A	Directional power sensor (peak and average power) 150 to 3500 MHz
JD734B	Terminating power sensor (peak power) 20 to 3800 MHz
JD736B	Terminating power sensor (average/peak power) 20 to 3800 MHz
<b>Accessory - RF miscellaneous</b>	
G710050581	Attenuator 40 dB, 100 W, DC to 4 GHz (unidirectional)
G710050585	RF directional coupler, 700 to 4000 MHz, 30 dB, 50 W Input/output; Type-N(m) to Type-N(f), tap off; Type-N(f)
G710050586	RF combiner, 700 to 4000 MHz, Type-N(f) to Type-N(m)
G710050587	4x1 RF combiner, 700 to 4000 MHz, Type-N(f) to Type-N(m)
JD70050007	AntennaAdvisor handle
<b>Accessory - general</b>	
G700050431	CellAdvisor 5G soft carrying case
G700050150	98 Wh Lithium-Ion Battery
G700050125	CA5G Automotive cigarette lighter DC/DC adapter
G700050126	CA5G AC/DC power adapter 160 W 19 V
G700050433	CA5G backpack carrying case with monopod
G700050434	CA5G harness for indoor application
G700050700	CA5G hard carrying case with wheels

Accessory - OTDR Modules	
E4106MA2-PC / E4106MA2-APC	1310/1625 nm, PC or APC connector - Short/medium-haul qualification
E4126MA2-PC / E4126MA2-APC	1310/1550 nm, PC or APC connector - Short/medium-haul qualification
E4136MA2-PC / E4136MA2-APC	1310/1550/1625 nm, PC or APC connector - Short/medium-haul qualification
E4126MA3-PC / E4126MA3-APC	1310/1550 nm - Short/medium/long-haul qualification
E4136MA3-PC / E4136MA3-APC	1310/1550/1625 nm - Short/medium/long-haul qualification
E4146QUAD	Multimode 850/1300 nm & Singlemode 1310/1550 nm - Short/medium-haul qualification
E41DWDMC-PC / E41DWDMC-APC	Tunable DWDM C-band 1528 nm to 1568 nm, PC or APC connector- Short/medium/long-haul qualification

## VIAVI Care Support Plans

### Increase your productivity for up to 5 years with optional VIAVI Care Support Plans:

- Maximize your time with on-demand training, priority technical application support and rapid service.
- Maintain your equipment for peak performance at a low, predictable cost.

Plan availability depends on product and region. Not all plans are available for each product or in every region. To find out which VIAVI Care Support Plan options are available for this product in your region, contact your local representative or visit: [viavisolutions.com/viavicareplan](https://viavisolutions.com/viavicareplan)

## Features

\*5-year plans only

Plan	Objective	Technical Assistance	Factory Repair	Priority Service	Self-paced Training	5 Year Battery and Bag Coverage	Factory Calibration	Accessory Coverage	Express Loaner
 BronzeCare	Technician Efficiency	Premium	✓	✓	✓				
 SilverCare	Maintenance & Measurement Accuracy	Premium	✓	✓	✓	✓*	✓		
 MaxCare	High Availability	Premium	✓	✓	✓	✓*	✓	✓	✓



Contact Us **+1 844 GO VIAVI**  
(+1 844 468 4284)

To reach the VIAVI office nearest you,  
visit [viavisolutions.com/contact](https://viavisolutions.com/contact)

© 2021 VIAVI Solutions Inc.  
Product specifications and descriptions in this document are subject to change without notice. Patented as described at [viavisolutions.com/patents](https://viavisolutions.com/patents) ca5g-continuous-spectrum-ds-nsd-nse-ae 30193100 900 0521