


# VIAVI Broadband Log Periodic Antenna

## Quickly identify and isolate RF interference


The VIAVI Solutions® broadband log periodic antenna is an extremely cost-effective solution that works with an AntennaAdvisor handle and CellAdvisor/CellAdvisor 5G/OneAdvisor-800 base station analyzers to let technicians at any skill level quickly identify and isolate RF interference. With a wide frequency coverage (up to 6 GHz), field technicians working in the cellular spectrum only need this one antenna for different cellular bands. A robust design and rugged construction with a high-tech radome housing protects against mechanical stress and environmental influence without sacrificing performance.




G700050366/G700050367 antennas

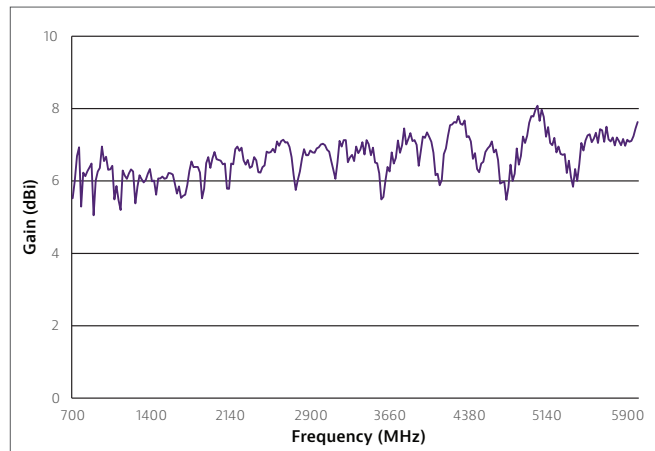

Antenna gain

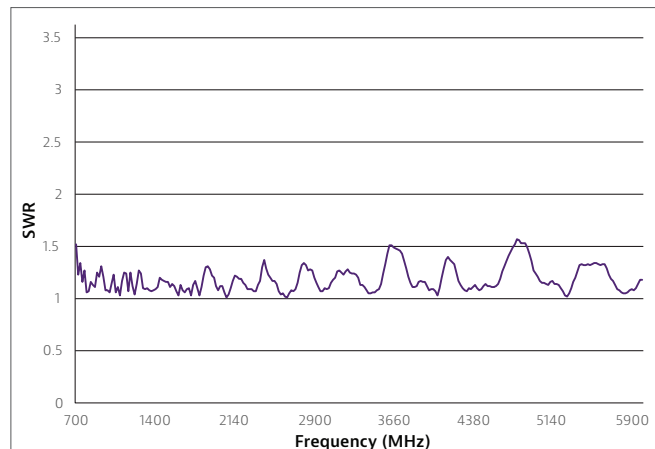


Antenna VSWR

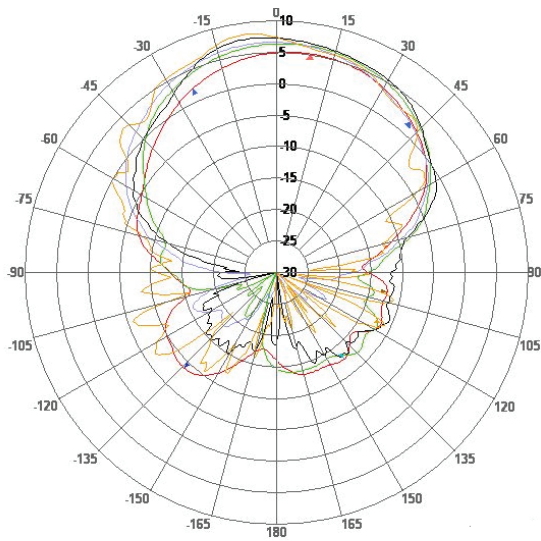

E-plane

0.7 GHz  
1.0 GHz  
2.0 GHz  
4.0 GHz  
6.0 GHz

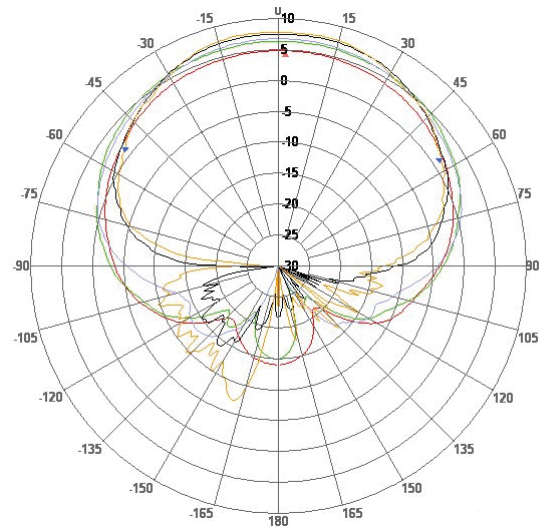

H-plane

0.7 GHz  
1.0 GHz  
2.0 GHz  
4.0 GHz  
6.0 GHz

Antenna gain pattern

## Specifications

Item	Specification	Remark
Frequency range	650 MHz to 4 GHz	
	650 MHz to 6 GHz	
Input power	50 W max.	Continuous wave
Peak gain	5 dBi (typical)	
VSWR	2.0:1 (typical)	
Impedance	50 ohm	
Temperature range	-30 to +70°C (-22 to 158°F)	
Connector	SMA (Female)	
Dimension	197 x 310 x 25.4 mm (7.75 x 12.20 x 1 inch)	

## Ordering Information

Description	Part Number
Log periodic antenna, 650 MHz to 4 GHz	G700050366
Log periodic antenna, 650 MHz to 6 GHz	G700050367
AntennaAdvisor handle (requires interference analysis option 011 on CellAdvisor, S013 on CellAdvisor 5G or ONA-SP-INTAN on OneAdvisor-800)	JD70050007