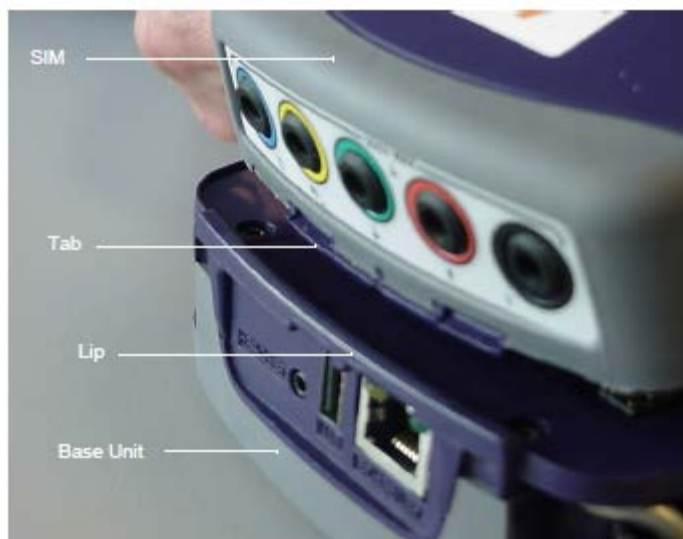# JDSU

Attaching a module to the HST-3000

Attaching a SIM The following procedure describes how to attach a service interface module (SIM).

To attach a SIM

1 Locate the tab on the SIM and the lip on the top of the base unit.

NOTE:

Some SIMs are larger than others. For most SIMs, the tab will be on the top edge of the SIM; for others, it is near the middle of the SIM.

2 Turn the base unit so you are looking at it from the side.

3   Position the SIM at approximately a 45 degree angle and push the tab under the lip as shown in Figure 9.

Figure 9   Inserting the SIM tab

You should be able to feel that the SIM tab is inserted correctly, as you cannot push the SIM forward. Figure 10 shows an *incorrect* insertion.

Figure 10   Incorrect SIM attachment

4   Carefully press the bottom of the SIM into place.

The SIM should slide into place easily with only a little resistance, and should fit snugly against the base unit.

CAUTION: DAMAGE TO UNIT

Do not force the bottom part of the SIM into place. If you use excessive force, you may damage the unit.

If the SIM does not slide easily into place, reposition the tab to be sure it is beneath the lip, and then carefully press the bottom part of the SIM into place.

5   On the SIM, tighten the ¼-turn fastener (using a screwdriver.

The module is connected.