

SecureTime altGNSS GEO-L Helical Antenna

Compatible Products

- SecurePNT EdgeGM 7000L
- SecurePNT 6200L
- μ PNT GEOL-2600 (standalone module)

Typical Specifications


Gain	
Low Noise Amplifier	+26 dB
Antenna Element	+13 dBic
Total Transducer Gain	+39 dBic
Operating Temperature	-40°C to +70°C
Impedance	50 Ohms
Return Loss	≤ 9 dB
Frequency	1518 to 1559 MHz
Polarization	Right-hand circular
Input Power	3 to 15 Vdc, 40 mA

Exterior Casing

Material	White Polymer Finish
Ingress	IP67
Input Connector	TNC Female



SecureTime altGNSS GEO-L Helical Antenna

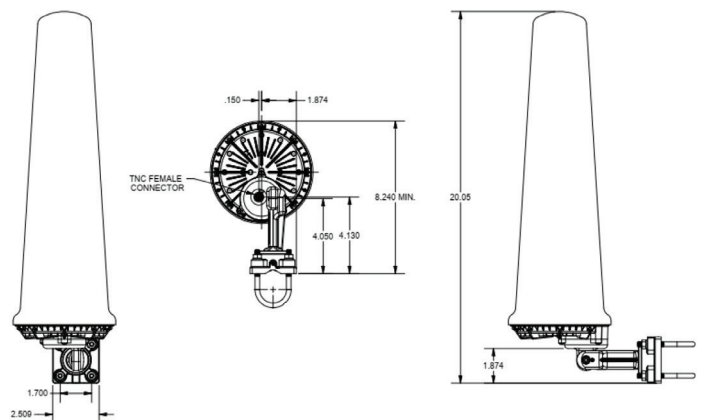

SecureTime altGNSS GEO-L Helical Antenna Dimensions

Typical Specifications continued

<i>Standards/Compliance Certifications</i>	
CE	
REACH	
RoHS	
WEEE	
<i>Weight and Dimensions</i>	
Weight	3.3 lbs
Dimensions	8.24 x 20.05 in
Ordering Information	
Catalog Number	22181620
Description	GEO-L Helical Antenna
SecureTime Service Option	altGNSS GEO-L



Contact Us: +1 800 835 2352 | avcomm.sales@viavisolutions.com.

© 2025 VIAVI Solutions Inc. Product specifications and descriptions in this document are subject to change without notice. Patented as described at viavisolutions.com/patents

securetime-altgnss-geol-ds-avi-nse-ae
30194598 900 0925

viavisolutions.com