

This Former Spirent Business is Now Part of VIAVI

Contact Us +1 844 GO VIAVI | (+1 844 468 4284)

To learn more about VIAVI, visit viavisolutions.com/en-us/spirent-acquisition


Spirent TestCenter

TWAMP and TWAMP Light Emulation


Overview

Two-Way Active Measurement Protocol (TWAMP) is used to measure two-way or round-trip network performance parameters such as latency and jitter by sending probe packets and measuring their experience in the network.

TWAMP is often used to check Service Level Agreement (SLA) compliance, and it consists of two inter-related protocols: TWAMP-Control and TWAMP-Test as shown in below figure.

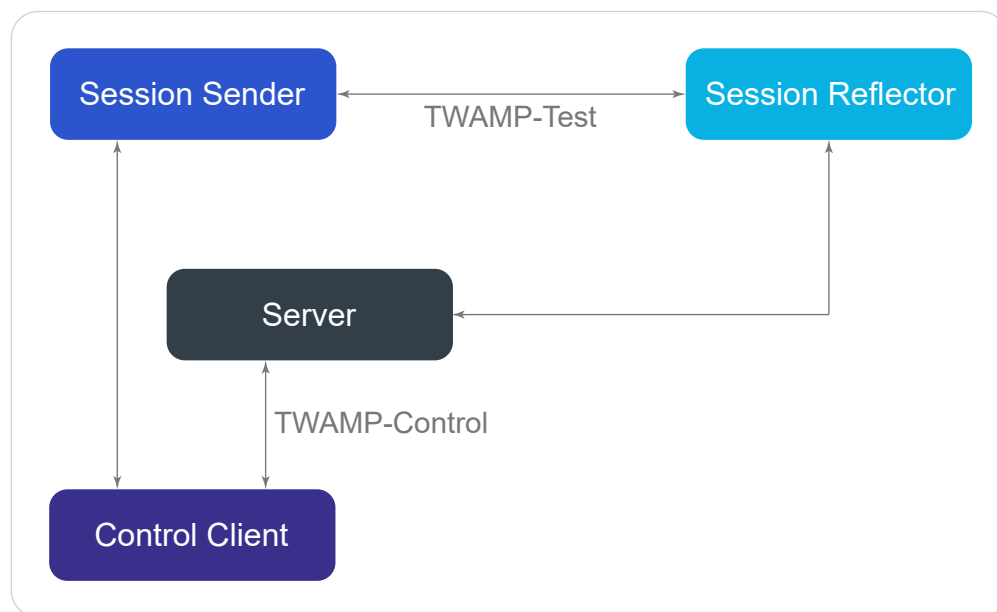

In the case of TWAMP Light, the roles of Control Client, Server, and Session Sender are implemented in one host referred to as the Controller, and the role of Session Reflector is implemented in another host referred to as the Responder. The Session Reflector does not necessarily have knowledge of the session state.

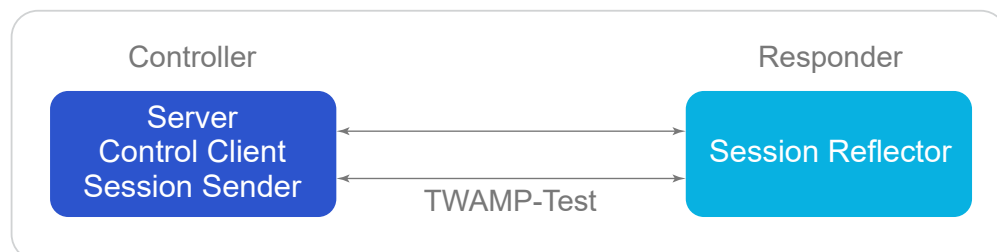

Spirent TestCenter TWAMP and TWAMP Light Emulation helps ensure TWAMP functionality design and measure network performance by emulating Client/Controller and/or Server/Responder.

Furthermore, Spirent TestCenter also provides one-way service measurement based on TWAMP and TWAMP light solution, this allows the one-way network performance to be measured separately for more detailed analysis. Sender and Reflector should be timing synchronized to get accurate result.

Features & Benefits

- Support RFC5357
- Support both TWAMP and TWAMP Light
- Provide both round-trip and one-way service measurement
- Can emulate Client/Controller and Sever/Responder
- Support both IPv4 and IPv6
- When emulating TWAMP Client/Controller, support user configurable connection retry interval, retry count, source/destination UDP port, session timeout timer and duration, and DSCP
- When emulating TWAMP Light Responder, support user configurable local UDP ports
- Provide session counts for
 - Request
 - Accept
 - Failed
 - Start
 - Start acknowledge
 - Stop at both Client and Server sides
- Rich two-way network performance service measurements include
 - Minimum/maximum/average latency
 - Minimum/maximum/average jitter
- Enhanced one-way network performance service measurements include
 - Client to server minimum/maximum/average latency
 - Client to server minimum/maximum/average jitter
 - Server to client minimum/maximum/average latency
 - Server to client minimum/maximum/average jitter

Ordering Information

Product Number	Description
BPK-1156A	TWO-WAY ACTIVE MEASUREMENT PROTOCOL (TWAMP) PERFORM BASE PKG
BPK-1380	TWAMP LIGHT BASE PACKAGE

Note: To enable TWAMP Light, both BPK-1156A and BPK-1380 are required.

About Spirent Communications

Spirent Communications (LSE: SPT) is a global leader with deep expertise and decades of experience in testing, assurance, analytics and security, serving developers, service providers, and enterprise networks. We help bring clarity to increasingly complex technological and business challenges. Spirent's customers have made a promise to their customers to deliver superior performance. Spirent assures that those promises are fulfilled. For more information visit: www.spirent.com

Americas 1-800-SPIRENT

+1-800-774-7368 | sales@spirent.com

Europe and the Middle East

+44 (0) 1293 767979 | emeainfo@spirent.com

Asia and the Pacific

+86-10-8518-2539 | salesasia@spirent.com