


Infrared Long Wavepass Filters



Infrared long wavepass filters developed by Viavi Solutions provide high transmission over the spectral region from the cut-on wavelength to approximately twice the cut-on wavelength, and can be deposited on a variety of infrared transmitting substrates. The cut-on wavelength can be located anywhere in the infrared up to approximately 16 μm .

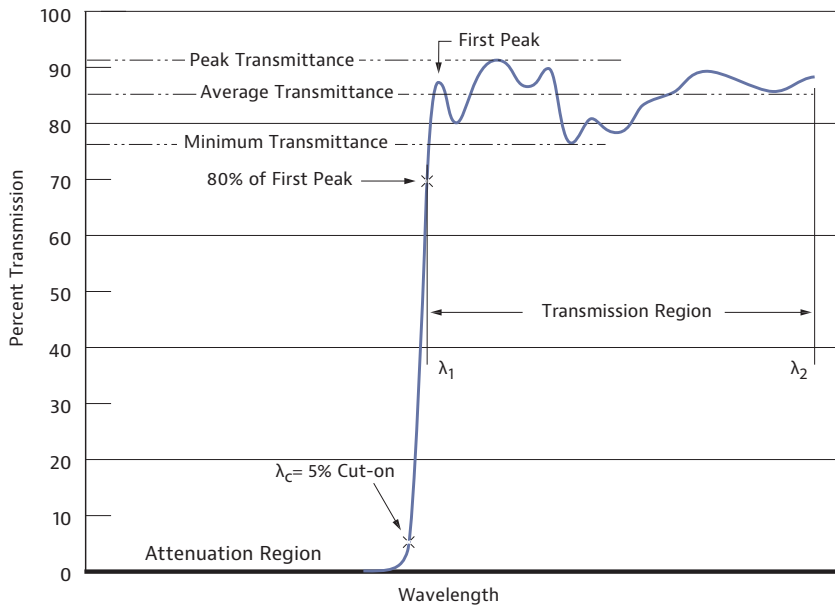

Key Features

- Excellent coating uniformity
- Tightly toleranced precision filter expertise
- Flat spectral profile
- High peak transmission value
- Excellent blocking
- Wide range of filters and assemblies for the infrared sensing and imaging instrumentation market
- High volume capability
- Expert application engineering support
- Available filter substrates are: Si, Ge, Glass, Sapphire, Quartz, Fused Silica, ZnS, ZnSe

Applications

- Gas monitoring
- Temperature sensing
- Thermal imaging
- Motion sensing

Standard

- Temperature, humidity, mild abrasion, adherence: MIL-F-48616

Spectral Characteristics

Parameter	Symbol	Conditions	Minimum	Maximum
Cut-on wavelength range ¹	λ_c	At 5% transmission, 25°C, 0° AOI	1 μm	16 μm
Nominal bandwidth ^{1,2}	λ_2/λ_1	At 25°C, 0° AOI	1.3	1.9
Cut-on/Cut-off slope ^{1,3}		At 25°C, 0° AOI	3%	6%
Absolute center wavelength drift vs temperature			0.002%/°C	0.01%/°C

Minimum Transmission

Center Wavelength Range	Nominal Bandwidth λ_1/λ_2	Minimum Average Transmittance ^{4,5}	Minimum Absolute Transmittance ^{4,5,6}
1 to 3 μm	1.3	85%	75%
	1.6	80%	70%
	1.9	80%	70%
3 to 8 μm	1.3	85%	80%
	1.6	85%	75%
	1.9	80%	70%
8 to 12 μm	1.3	80%	70%
	1.6	80%	70%
	1.9	80%	65%
12 to 15 μm	1.3	75%	65%
	1.6	70%	55%
	1.9	45%	30%

Filter Size

Type	Minimum	Maximum
Square or rectangle	2 mm	100 mm
Diameter	2 mm	150 mm
Thickness	0.3 mm	—
Thickness tolerance ⁷	± 0.025 mm	—

1. AOI: angle of incidence.

2. λ_1 is defined as $\lambda_c + (3\% \text{ to } 6\% \text{ of } \lambda_c)$.

3. Cut-on/Cut-off slopes $\geq 4\%$ are for standard design and consistent with standard production yields.

4. All transmission values are consistent with standard production yields.

5. All transmission values are for filters attenuated below the cut-on wavelength to $T \leq 0.1\%$ average.

6. Minimum Absolute Transmission is the value below which transmission will not fall for any wavelength in the wavelength region defined by λ_2/λ_1 .

7. Thickness tolerance for standard design is ± 0.1 mm.



Americas +1 800 254 3684
 Europe +33 1 30 81 50 41
 Asia Pacific +86 512 6956 7895
 E-mail ospcustomerservice@viavisolutions.com

© 2015 Viavi Solutions, Inc.
 Product specifications and descriptions in this document are subject to change without notice.
 irlwp-ds-co-ae
 30137511 903 0813