

AVX-10K

Military Flight Line Test Set

Performance verification testing of mission-critical avionics systems

The AVX-10K is a comprehensive flight line test solution that provides today's Avionics Technician with an easy-to-use instrument for testing communication, navigation, and surveillance systems. With an intuitive user interface, testing is simplified with built-in auto-tests for transponder applications. Guided tests can be created to replicate existing procedures to assist users for Navigation and AM/FM Communication system verification. Built-in VSWR, DTF and Cable Loss measurements aid in troubleshooting faults found during normal testing or reported by the operator.



AVX-10K-MIL

NSN: 6625-01-724-4448

Features

- Configurable test capability
- Intuitive user interface
- Software-defined applications
- Guided Test for COMMs and Navigation Applications
- Built-in GPS receiver
- International test configurations

Benefits

- Time saving ease of operation
- Easily updated with future applications
- Efficient and repeatable testing
- Recall saved test sequences for future use
- Provides accurate positional data for ADS-B testing
- Compliant with global regulatory requirements

Test Usage

- Replaces the following test sets
 - IFR4000
 - IFR4000AR
 - IFR6000
 - IFR6015
 - 3515 Airborne COMMs Testing including scripting¹ capability

¹Consult Factory for Availability

The Future of Flight Line Avionic System Testing

Building on nearly 50 years of providing superior avionics test sets, the AVX-10K is a compact, durable tester capable of providing a wide range of quick airborne system auto-tests and in-depth troubleshooting using software specific applications.

Using over-the-air, direct and coupled connections the AVX-10K can provide testing for the following systems:


| Communications | Navigation | Surveillance |
|------------------------|------------|-------------------------------------|
| • AM | • TACAN | • Military Modes 1, 2 & 3 |
| • FM | • DME | • Modes A, C, S |
| • SSB (HF) | • ILS | • ADS-B Out |
| • SELCAL | - LOC | • ADS-B In (Target Gen) |
| | - GS | - 1090 MHz (ADS-B, ADS-R, TIS-B) |
| | - MB | - 978 MHz UAT (ADS-B, TIS-B, FIS-B) |
| Other Test Tool | - VOR | - TCAS I/II and TAS testing |
| • ELT | | • ADS-B Monitoring |
| • VSWR | | • GICB Monitoring |
| • Distance to Fault | | • UAT Monitoring |
| • Cable Loss | | |

The added flexibility of software-based test configurations means the AVX-10K provides the right capabilities for every maintenance and troubleshooting need.



Transponder antenna couplers provide for a controlled test environment and eliminate the need for DD-1494 requirement.

2 AVX-10K Military Flight Line Test Set

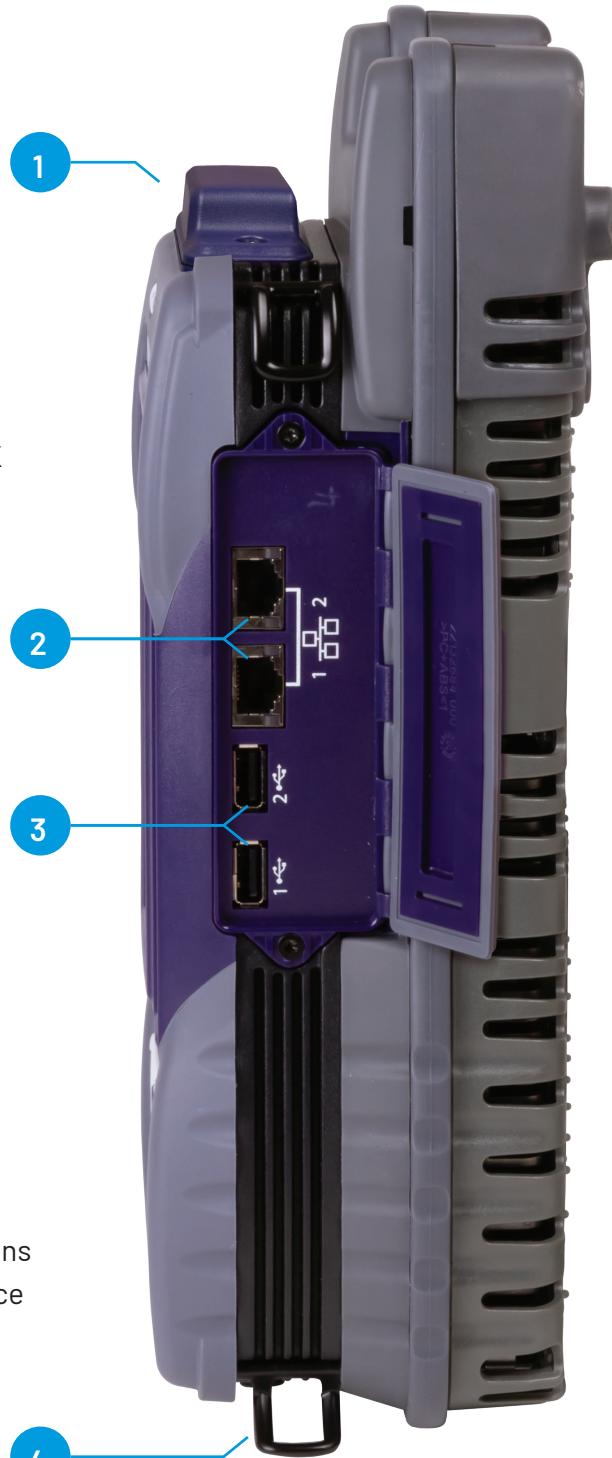

AVX-10K Side Detail

1. GPS Antenna
2. Dual Ethernet Ports
3. Dual USB Ports
4. Hand Strap Clips




AVX-10K Front Detail

- 5. Power Button
- 6. Speaker
- 7. Back Button
- 8. Home Button
- 9. Quick Tray Button
- 10. Cursor Control Keys
- 11. Function Keys
- 12. Full Color Touch Screen Display
- 13. Status Indicator Lights
- 14. GPS Antenna
- 15. Antenna(ANT) Port
- 16. Direct(RF/IO) Port
- 17. SWR Port

Simple and clean user interface provides clearly marked pass/fail results while expandable ribbons provide access to detailed data for further analysis.

Comprehensive All-In-One Test Set

Transponder

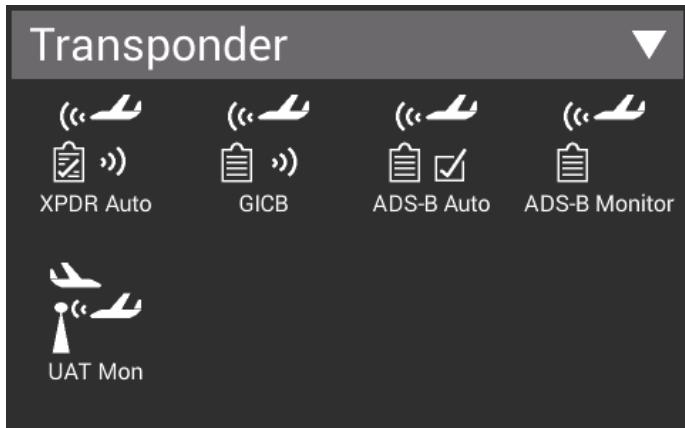

Transponder Auto – This test function provides a selection of configured test options, including Military Transponder Modes 1,2 & 3, ATCRBS, Mode S, Transponder FAR Part 43, and many more.


GICB – Testing the GICB capabilities can be performed in Simple Mode (known registers) or Advanced Mode (full register set).

ADS-B Auto – Available Test Types for this option include AC 20-165 and CS-ACNS. Testing supports both Airborne and Surface configurations.

ADS-B Monitor – GPS Position can be manually entered or can be determined with the built-in GPS Receiver. Monitoring supports both Airborne and Surface configurations.

UAT Monitor – Allows monitoring of received UAT messaging and will decode and display each received Aircraft Address and Payload Type Code.

TCAS/Target Generation

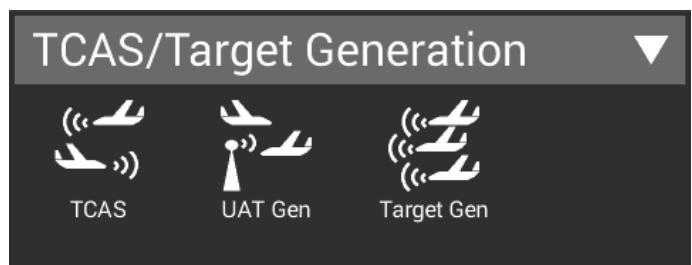


ACAS-TCAS /E-TCAS – This option lets you set up an intruder and run a scenario to ensure TCAS functionality. Intruder types includes either Mode S or ATCRBS.

UAT Gen – Provides access to setup targets and run ADS-B, FIS-B and TIS-B testing for the UAT frequency.

Target Gen – This feature allows the user to set up and stimulate up to five static targets. Target types can be 1090 MHz ADS-B, ADS-R or TIS-B. Each target will be associated with the Aircraft Under Test's Latitude, Longitude, Heading and Position which are all configurable.

Navigation

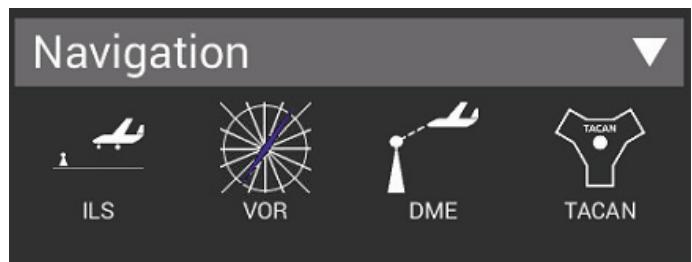


ILS – Provides simultaneous Localizer (with swept DDM), Glideslope and Marker Beacon Signals.

VOR – Generates signals over the VOR Band (108.00 to 117.95 MHz) with 30 Hz reference phase and 9960 Hz (sub-carrier frequency modulated with 30 Hz variable phase) amplitude modulated at 30% per tone. VOR bearing selection is provided in preset steps of 30° or variable steps of 0.1°.

DME – Single DME test screen provides control over DME Frequency/Channel, Range, Rate, RF level, % Reply, Squitter, Ident and Echo. UUT frequency, ERP, PRF P1/P2 width and Spacing are also displayed.

TACAN – Combines Range and Bearing control along with Range Rate and Bearing Rate including Air-to-air modes. Displays measured values on received signal.

Radio Test (COMMS)

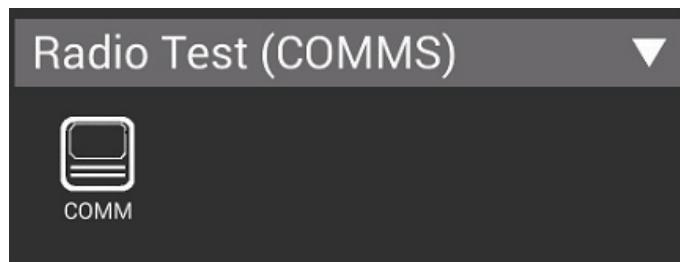

COMM AM – Provides signal generation over the Range of 10.00 to 512.00 MHz in 1 kHz increments. Monitoring of transmitter power and modulation depth over the same range while directly connected. A calibrated 1020 Hz tone, amplitude modulated at 30%, is also provided. Frequency control is provided in 8.33 kHz/25 kHz channel steps or in 1 kHz variable steps. Audio output is available. Over-the-air measurements include metering for power (RSSI), frequency, AM modulation. User defined pass/fail limits can be added via Scripted Test application.

COMM FM – Provides signal generation over the Range of 10.00 to 512.00 MHz in 1 kHz increments and monitoring of transmitter power and modulation deviation over the same range while directly connected. A 1000 Hz tone, frequency modulated at 5 kHz, is also provided. Frequency control is provided in 12.5 kHz/25 kHz channel steps or in 1 kHz variable steps. Audio output is available. Over-the-air measurements include metering for power (RSSI), frequency range 30.00 to 512.00 MHz and FM deviation. User-defined pass/fail limits can be added via the Scripted Test application.

COMM OTA UUT Sensitivity Test – Provides 800 Hz/1200 Hz repeating tone pattern, allowing the operator in the cockpit to easily identify a tone pattern.

COMM SSB – Provides signal generation and monitoring of transmitter power and modulation depth over the range of 10.00 to 30.00 MHz. A 1000 Hz tone is also provided. Audio output is available.

SELCAL – Provides selectable consecutive amplitude modulated tone pulse pairs, which may be sent continuously or as a burst.


ELT



121.5/243 BEACON Modes – Provides monitoring for 121.5/243 MHz swept tone short range Beacons and displays transmitter frequency, power and start/stop tone frequencies. Audio output is available.

406 BEACON Mode – Provides monitoring for 406 MHz COPAS/SARSAT Emergency Locator Transmitter (ELT), Emergency Position Indicating Radio Beacons (EPIRB), and Personal Locator Beacons (PLB). The Beacon utilizes BPSK data to transmit position information derived from a long-range navigation system or GPS receiver. The Protocol management and data field decode is automatically handled by the AVX-10K.

Test Tools

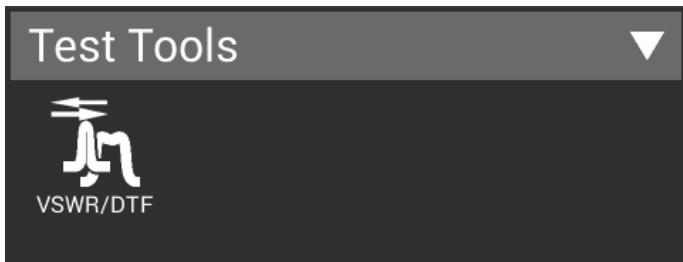

Cable Loss – This feature helps identify problems, as the loss identified on a cable may not be correct causing erroneous readings in test set ups and also to identify issues with coaxial cable that can contribute to poor system performance.

Guided Test – Available in the COMM's and NAVIGATION instruments, guided test allows you to create and save a test sequence by either manually stepping to the next test or automatically stepping to the next test based on a user set time interval. This is a user created test and is beneficial for replicating existing procedures for a consistent and repeatable test.

Templates – allows the user to save all set-up parameters for the entire test set and recall for a later use. This is useful should you have common repeatable set-up parameters across multiple test applications for a specific aircraft platform. Next time you test that platform, simply choose the desired template and all saved set-up parameters will be recalled, saving time.


Secure Use – This feature allows you to enable/disable wireless capability (WiFi/BT) under password control. When wireless capability is enabled, allows you to control the AVX-10K using a mobile device with the VIAVI Mobile Tech App.

Note - all military kit configurations are shipped from the factory with wireless capability disabled.

VSWR/DTF – This test tool is provided to assist in troubleshooting RF level issues. Test mode for both VSWR and Distance To Fault (DTF) testing can be set to VSWR or Return Loss.

AVX-10K Military Configurations and Ordering Information (CAGE: 51190)

| Preconfigured Kits (• = Standard Item, all other items optional) | | | | AVX-10K-NAV-M 22182233 6625-01-559-2384 | AVX-10K-SVLC-M 22182230 | AVX-10K-MIL 22182232 6625-01-724-4448 6625-01-726-6289 |
|------------------------------------------------------------------|-----------------|---------------------|---------------------------------|-----------------------------------------------|----------------------------|-----------------------------------------------------------------|
| TEST CAPABILITY | Catalog No. | P/N | Item Description | | | |
| SOFTWARE OPTIONS | AVX-10K-SXPDR | 22142210 | Transponder Modes A,C,S | | • | • |
| | AVX-10K-SADSB | 22142212 | ADS-B In/Out/GICB/FIS-B | | • | • |
| | AVX-10K-STCAS | 22142213 | TCAS I/II | | • | • |
| | AVX-10K-SDME | 22154823 | DME | | • | • |
| | AVX-10K-SUAT | 22142214 | UAT In/Out | | | • |
| | AVX-10K-SNAV | 22142216 | Navigation(ILS - LOC, GS, MB) | • | | • |
| | AVX-10K-SELT | 22142217 | ELT 121.5/243/406 MHz | • | | • |
| | AVX-10K-SCOM | 22142218 | Radio Test AM/FM(COMMs) | • | | • |
| | AVX-10K-SECOM | 22183325 | Radio Test Enhanced(COMMs) | • | | • |
| | AVX-10K-STACAN | 22174694 | TACAN | | • | • |
| | AVX-10K-SETCAS | 22174693 | E-TCAS | | • | • |
| | AVX-10K-SM1/2 | 22174692 | XPDR Military Modes 1/2/3 | | • | • |
| | AVX-10K-SSECURE | 22183049 | Secure (Wireless Disabled) Mode | • | • | • |
| Item # | Qty | | | | | |
| 1 | 1 | AVX-10K TEST SET | 22137163 | AVX-10K Base Unit | • | • |
| 2 | 1 | AC10K-PWRADPTR | 22146602 | AC/DC Power Adapter | • | • |
| 3 | 1 | AC10K-ANT-ILS | 22153600 | Antenna, ILS and COMMs | • | • |
| 4 | 1 | AC10K-ANT-MB | 22153599 | Antenna, 75 Mhz MB | • | • |
| 5 | 1 | 22141787 | 22141787 | Antenna, RF Flat Panel | • | • |
| 6 | 1 | 87431 | 87431 | Shield/Coupler, UC-584 | • | • |
| 7 | 1 | 22183050 | 22183050 | Attenuator | • | • |
| 8 | 1 | 22183051 | 22183051 | Headset Adapter | See Note 1 | See Note 1 |
| 9 | 1 | AC10K-ADPTRKIT | AC10K-ADPTRKIT | Adapter Kit | • | • |
| 10 | 1 | 62401 | 62401 | Cable, Coax 1' | • | • |
| 11 | 1 | AC10K-CBL6FT | 22152432 | Cable, Coax 6' | • | • |
| 12 | 1 | 141131 | 141131 | Cable, Coax 25' | • | • |
| 13 | 1 | AC10K-PWRCRD-US/CAN | 22022754 | AC Power Cord, US/Canada | • | • |
| 14 | 1 | AC10K-PWRCRD-EU | 22022744 | AC Power Cord, Continental Europe | • | • |
| 15 | 1 | AC10K-OPSMNL | 22141759 | Operations Manual | • | • |
| 16 | 1 | AC10K-QSGUIDE | 22135253 | Quick Start Guide | • | • |
| 17 | 1 | AC10K-HANDSTRAP | 22142165 | Hand Strap | • | • |
| 18 | 1 | AC10K-TRANCASE | 22138519 | Transit Case | • | • |

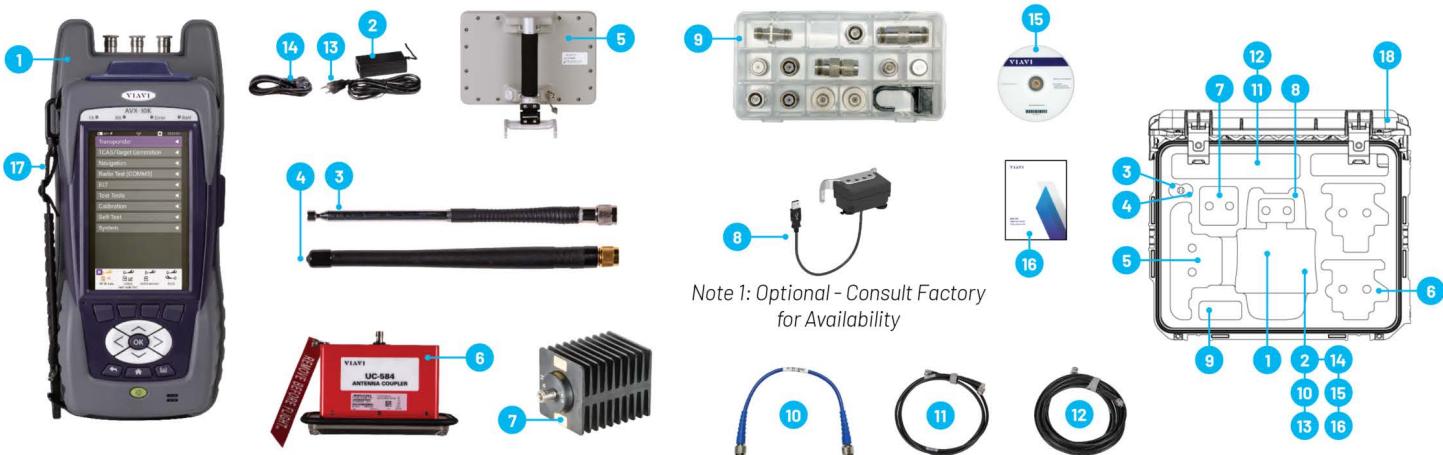


CAGE: 51150 - AVX-10K Adapter Kit Comprising Items List

P/N: AC10K-ADPTRKIT

| Item # | Qty | P/N | Description | AC10K-ADPTRKIT | Configurations | | |
|--------|-----|----------|--------------------------------|----------------|------------------------|-------------------------|----------------------|
| | | | | | AVX-10K-NAV-M 22182233 | AVX-10K-SVLC-M 22182230 | AVX-10K-MIL 22182232 |
| 1 | 1 | 24140 | Cap, TNC, Female Short | ● | ● | ● | ● |
| 2 | 1 | 24141 | Load 50 Ω, TNC-F, DC - 6.0 GHz | ● | ● | ● | ● |
| 3 | 1 | 138598 | Adapter, TNC-F to TNC-F | ● | ● | ● | ● |
| 4 | 1 | 22183053 | Adapter, TNC-M to BNC-M | ● | ● | ● | ● |
| 5 | 1 | 23758 | Adapter, TNC-M to BNC-F | ● | ● | ● | ● |

Items below are not part of AC10K-ADPTRKIT, but are included when ordering the above configurations AVX-10K-NAV, AVX-10K-SVLC or the AVX-10K. These must be purchased separately if not ordering one of these configurations.

| | | | | | | | |
|----|---|----------|-------------------------|---|---|---|---|
| 6 | 1 | 22181865 | Adapter, N-F to TNC-F | ● | | | ● |
| 7 | 1 | 23773 | Adapter, N-F to N-F | | ● | | ● |
| 8 | 1 | 92553 | Adapter, N-F to TNC-M | | ● | | ● |
| 9 | 2 | 38589 | Adapter, N-M to TNC-F | ● | | | ● |
| 10 | 1 | 22183052 | Hook, Coupler Placement | | | ● | ● |
| 11 | 1 | 22183055 | Cap, TNC Coupler Hook | | | ● | ● |
| 12 | 1 | 58525 | Load, 50 Ω 1kW Peak | | | ● | ● |

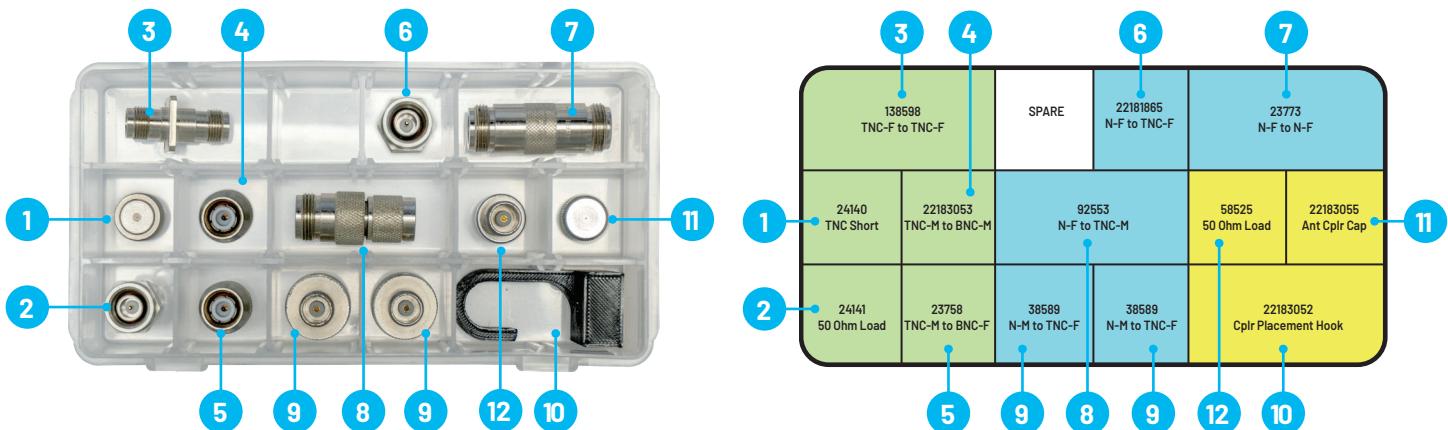

Additional Selectable Power Cords

| Catalog No. | Item Description |
|---------------------|---------------------------------------|
| AC10K-PWRCRD-AUSNZ | AC Power Cord - Australia/New Zealand |
| AC10K-PWRCRD-INDIA | AC Power Cord - India |
| AC10K-PWRCRD-UK/IRE | AC Power Cord - UK/Ireland |
| AC10K-PWRCRD-SWITZ | AC Power Cord - Switzerland |

Optional Accessories

| Catalog No. | SERD/NSN | Item Description |
|-------------------------|------------------|--------------------------------------------------------------------|
| Antenna Couplers | | |
| 113532 | | F-15 IFF Antenna Coupler Kit |
| 140600 | 65530 | F-16 IFF Antenna Coupler Kit |
| 140889 | | TC-201A TCAS/XPDR Directional Antenna Coupler (Min. 110" fuselage) |
| 22163082 | | TC-201B TCAS/XPDR Directional Antenna Coupler (Min. 92" fuselage) |
| 112350 | 6625-01-656-1915 | UC-584 L-Band Coupler Kit (Single) |
| 112349 | 6625-01-656-1993 | UC-584 L-Band Coupler Kit (Dual) |
| AC10K-UC584S | | Shield Coupler, UC-584S w 25' Cbl 141131) |
| 90106 | | UC-584S Coupler Placement Pole |

Optional Accessories

| | | |
|---------------|------------------|-----------------------------------------|
| 141589 | | TCAS Accessory Kit |
| AC10K-CC | | Soft Side Carrying Case |
| AC10K-BATTERY | | Internal Battery, Lithium Ion 7.3V 13Ah |
| AC10K-CBL12FT | | Cable, Coax 12' |
| 141131 | 4920-01-699-6237 | Cable, Coax 25' |
| 142839 | | Cable, Coax 50' |

Physical Characteristics

| | |
|-------------------|-----------------------------------------------------------|
| Test Set | 12" H x 5.3" W x 3.75" D 30.48 cm x 13.5 cm x 9.5 cm |
| Transit Case Size | 24.5" H x 19.3" W x 22.2" D 62.23 cm x 49.2 cm x 31 cm |
| Weight | 6.5 lbs. (2.94 kg) test set only |
| | 32 lbs. (14.51 kg) shipping weight |
| Battery | >4 hrs continuous, >8 hrs typical |
| Power | 100 - 250 VAC, 1.5 A max, 47-63 hz |

Environmental

| | |
|----------------|----------------------------------|
| Operating Temp | -20° to 55° C (-4° to 131° F) |
| Storage Temp | -30° to 71° C (-22° to 159.8° F) |

General Specification

Care Support Extended Warranty

| | | |
|------------------|------------------------------------------------------------|----------|
| AVX-10K-SILVER-5 | 5 Yr Total HW Warranty + Certified Calibrations - SILVER-5 | 60 Month |
| AVX-10K-SILVER-3 | 3 Yr Total HW Warranty + Certified Calibrations - SILVER-3 | 36 Month |
| AVX-10K-BRONZE-2 | 1 Yr Extended HW Warranty only - BRONZE-2 | 24 Month |

Certified Calibration Care Plan Add-ons (Requires corresponding Silver Care/MaxCare Plan)

| | |
|-----------------|------------------------------------------------------------------------------------------|
| CERT-CAL-DATA-3 | Certified Calibration Data - Pre and Post Cal Data Report for Care Plans - First 3 Years |
| CERT-CAL-DATA-5 | Certified Calibration Data - Pre and Post Cal Data Report |

Training

| | |
|------------|-----------------------------------------------------------------------|
| AVX-10K-TT | How to test with the AVX-10K - On-Site Instructor-Led Training, 1 day |
|------------|-----------------------------------------------------------------------|

Certificates and Certifications

AVX-10K Calibration Certificate (ISO 9001) (Included)

AVX-10K Calibration Certificate with Test Data (ISO 9001)

MIL-PRF-28800F Class 2

MIL-STD-810F

UL

EN

CE

Note: See AVX-10K data sheet for a complete listing of certifications



Ergonomic integrated kick stand makes running tests and reviewing results simple.



Flat panel antenna, whip antenna, or antenna couplers provide a variety of methods to connect to the system under test.



Contact Us: +1 800 835 2352 | avcomm.sales@viavisolutions.com.

© 2025 VIAVI Solutions Inc. Product specifications and descriptions in this document are subject to change without notice. Patented as described at viavisolutions.com/patents

avx10k-mil-sg-avi-nse-ae
30194236 903 1025

viavisolutions.com