

USB 1.1 Analog-to-Digital Converter

Digital Converter for FBP Probe Microscopes



USB 1.1 Analog-to-Digital Converter


Key Features

- View clear fiber end face images quickly and easily for detailed visual inspection of contamination
- Compact design for efficiency and portability with easy one-hand operation
- FBP probe is compatible with over 250 FBPT precision tips and adapters to inspect every connector and application
- Use FiberChek™ software with a PC/laptop for one-button capture and analysis of fiber end faces

Applications

- Use with JDSU test platforms or PC/laptop via a USB connection to visually inspect fiber end faces
- Quickly and easily inspect both bulkhead (female) and patch cord (male) sides of fiber interconnects
- Promote proper fiber handling workflow and practice

Inspect Before You ConnectSM

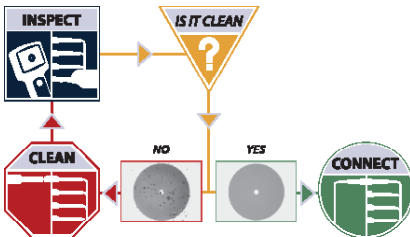

Contamination is the number 1 reason for troubleshooting optical networks. Proactive inspection and cleaning of fiber connectors can prevent poor signal performance, equipment damage, and network downtime.

USB 1.1 Analog-to-Digital Converter

The USB 1.1 converter is an upgrade kit for use with FBP-series probes and includes the basic FiberChek software. It lets users quickly and easily view, capture, save, and print images of fiber end faces. It features an image capture button to conveniently and instantly capture fiber end face images on screen.

FBP Video Probe Microscope

The FBP video probe microscope, in single or dual-magnification (200/400X), is the essential inspection tool for use with JDSU test platforms. The key components of the probe include an integrated light source, a 1/3-inch complimentary metal oxide semiconductor (CMOS) video camera, a focusing mechanism, and an optional image capture button. It is powered through the universal serial bus (USB) port and utilizes a blue coaxial light emitting diode (LED) light source with an advanced camera system to produce a high resolution fiber end face image. It fits and operates comfortably and easily in-hand, letting users inspect hard-to-reach connectors that are installed on the backside of patch panels or inside optical devices. The focus control is conveniently located on the probe to easily adjust the focus of the fiber image, while the optional dual-magnification control lets users quickly change between high- and low-magnification views.



FBP Probe Microscope



Analog-to-Digital Overview

The FBP probe microscope connects to the JDSU optical test platforms or to a PC/laptop via a USB digital converter. Simply connect the FBP probe to the module and plug the USB connection in an open USB port. The USB module, like the probe, offers an optional QuickCapture™ button to instantly capture the fiber end face image on the display. For use with a PC/laptop, a fiber analysis program (FiberChek) is included on a CD and requires software/hardware installation. No additional software is needed to interface with these JDSU test platforms: T-BERD, MTS, or TestPad.



T-BERD/MTS
not included.

The USB analog-to-digital converter is available in either a 4-pin or 6-pin configuration. The FBPP-USB3 connects to a standard 4-pin FBP probe, while the FBPP-USB1 model connects to a 6-pin FBP probe equipped with an integrated QuickCapture™ button used to instantly capture fiber end face images.



Laptop not
included.

USB Converter Specifications

Dimensions	150 x 580 x 180 mm (5.9 x 22.8 x 7.1 in) with 3-ft USB cable
Weight	80 g (2.8 oz)
Power	5V, 500mA from USB port
USB type	USB 1.1
Compatible test platform/devices	T-BERD 6000, T-BERD 8000, FST-2802, FST-2310, and other test units with a USB port; Windows®-based PC or laptop

Ordering Information

FBPP-USB1	USB analog-to-digital converter with 6-pin connection to FBP QuickCapture probe; FiberChek fiber analysis software
FBPP-USB3	USB analog-to-digital converter with 4-pin connection to FBP probe; FiberChek fiber analysis software
FBP-MTS-001	DUAL-mag (200/400X) FBP video probe microscope with QuickCapture image capture button; USB 1.1 digital converter; interchangeable FBPT inspection tips (7) in hard case: SC, SC-APC, FC, LC bulkhead tips, Universal 2.5 mm, 2.5mm APC, 1.25 mm patch cord tips; soft-sided carrying case



FBP-MTS-001
T-BERD/MTS Fiber Inspection Upgrade Kit

Test & Measurement Regional Sales

NORTH AMERICA TOLL FREE: 1 866 228 3762 FAX: +1 301 353 9216	LATIN AMERICA TEL: +1 954 688 5660 FAX: +1 954 345 4668	ASIA PACIFIC TEL: +852 2892 0990 FAX: +852 2892 0770	EMEA TEL: +49 7121 86 2222 FAX: +49 7121 86 1222	www.jdsu.com/inspect
---	--	---	---	--