

## Quick Card

# OneAdvisor-800

## Adding New Software Licenses via File

This quick card outlines how to apply newly purchased software options via USB or by placing the file onto the OneAdvisor-800 via file transfer.

### Equipment Requirements:

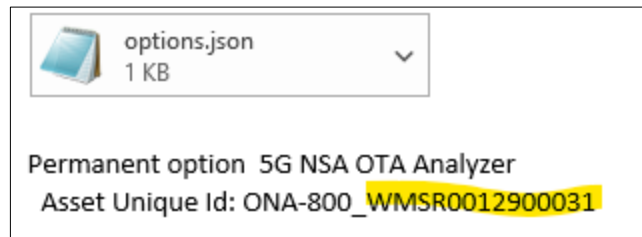
- Laptop or Personal Computer with email/Internet Access/FTP
- USB Flash Drive



*Figure 1: Equipment Requirements*

### Transfer License File:




1. You probably received the options file via email. The file needed is “options.json”. Confirm that the Serial Number of your OneAdvisor-800 matches what is shown in the email.



*Figure 1: Options File*

2. Transfer that file to a USB Flash Drive and then eject the drive from your computer.
3. If your organization has locked down all USB ports. As an alternative, you can FTP/SFTP the file onto the OneAdvisor provided you can achieve an IP connection between your PC and the OneAdvisor-800. Your organization may have a preferred method or program (Command Line, FileZilla, etc.) for FTP/SFTP. Use what your IT department condones. The default credentials for the OneAdvisor are:
  - a. username: advisor
  - b. Password: VIAVI
4. The destination folder for this file on the OneAdvisor is /user/licenses.

### OneAdvisor-800 Instructions:

1. Press the Power button  to turn on the test set.
2. Insert the USB Flash Drive into a USB port on the top of the T-BERD/MTS test set.
3. Tap the **Home** icon  in the **Status Bar** at the top of the display and then the System icon  on the left side panel to show the **System** menu.

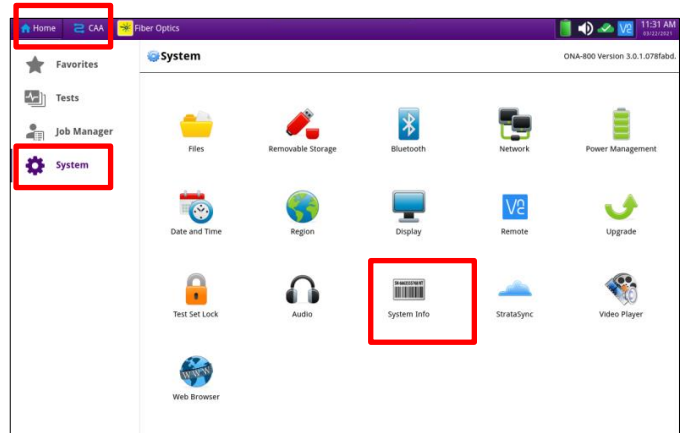






Figure 2: OneAdvisor-800 System Menu

4. Tap the **System Info** Icon  .
5. Tap  to open the import options screen.
6. Select **USB flash**  if you placed the options file on a USB device. Select **Licenses**  if you placed the file on the OneAdvisor via FTP/SFTP.

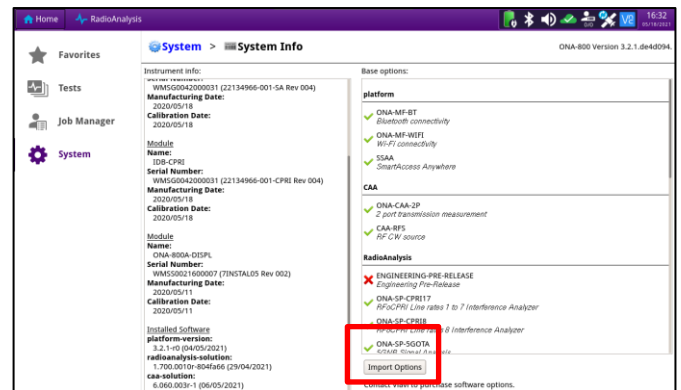


Figure 3: System Info Menu

7. Select the **Options.json** file and then select **Open**. This will install the licenses contained in the file.
8. Restart the OneAdvisor-800.

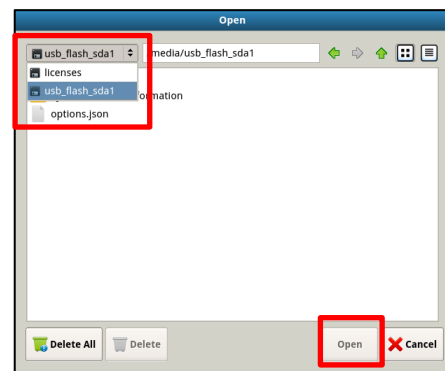





Figure 4: Options Open

9. Return to the  and check for green check marks next to the new licenses that should have been installed.

## Configuring OneAdvisor-800 Connectivity Settings:

-  Press the Power button to turn on the OneAdvisor-800.
-  Tap the **Home** icon in the **Status Bar** at the top of the OneAdvisor-800 and then select the **System menu**.

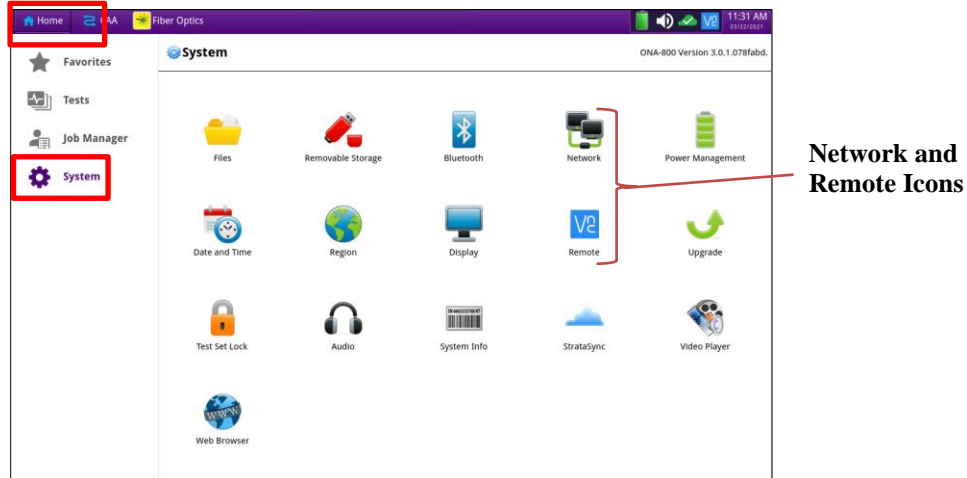



Figure 5: System Menu

-  Tap on the **Network** icon to display Management Network settings.

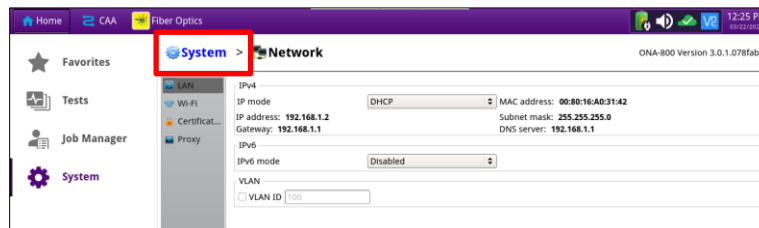




Figure 6: Network Settings

-  If using the OneAdvisor-800 **Wi-Fi interface** for remote access, tap the **Wi-Fi** icon on left screen side, and tap the **Enable wireless adapter** check box. Select the desired Wi-Fi network from the list and provide login credentials to join the network and obtain an IP address.
-  If using the OneAdvisor-800 **RJ-45 Ethernet Management Port** for remote access, connect CAT5E or better cable between the OneAdvisor-800 RJ-45 connector and the router or PC. Tap the **LAN** icon on left screen side. If using DHCP, set **IP Mode** to **DHCP** and wait until unit obtains an IP address; otherwise set **IP Mode** to **Static** and configure a static IP address.